


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 43.30 lm/W			
MODEL		Imax(cd)	238.3	S/MH(C0/180)	1.29
NOMINAL POWER(W)	15.3965	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.077	TOTAL FLUX(lm)	666.74	η UP,DN(C0-180)	0.0,51.0
NOMINAL FLUX(lm)	666.736	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.077	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

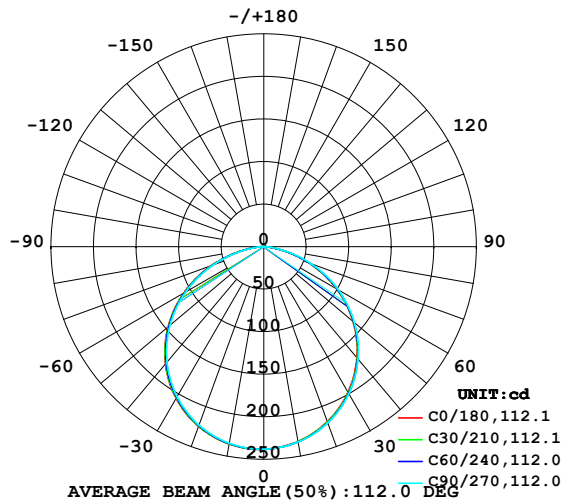

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

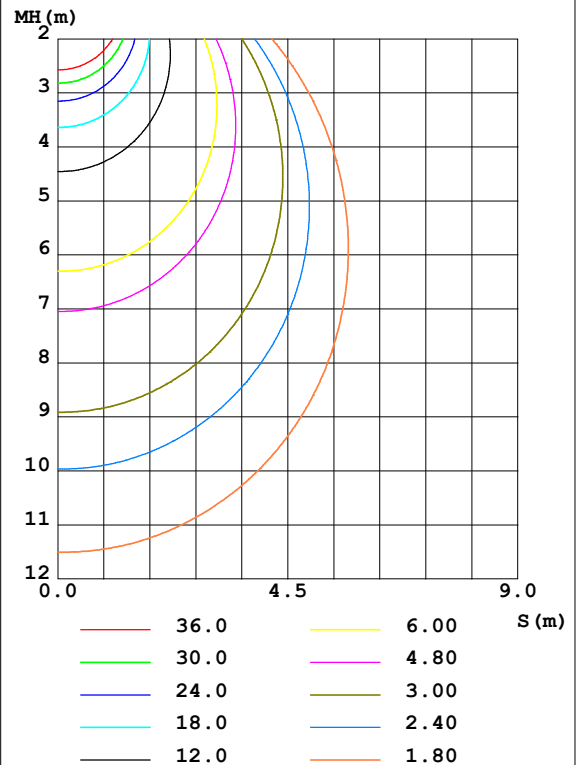

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	235.5	235.1	234.7	234.4	232.5	232.8	233.1	233.4	0- 10	22.53	22.53	3.38,3.38
20	224.7	224.0	223.2	222.7	218.8	219.7	220.4	220.9	10- 20	64.59	87.12	13.1,13.1
30	206.1	205.1	203.8	203.2	197.9	199.1	200.0	200.7	20- 30	98.07	185.2	27.8,27.8
40	179.9	178.8	177.0	176.3	170.3	171.5	172.5	173.7	30- 40	118.4	303.6	45.5,45.5
50	147.0	145.8	143.9	143.0	137.0	138.0	139.2	140.4	40- 50	122.7	426.3	63.9,63.9
60	108.5	107.0	105.5	104.0	98.54	99.35	101.0	102.0	50- 60	109.9	536.2	80.4,80.4
70	66.14	64.33	63.20	61.23	56.88	57.44	59.45	60.26	60- 70	81.42	617.6	92.6,92.6
80	23.53	22.43	21.42	19.64	16.73	17.42	19.07	19.79	70- 80	42.14	659.8	99,99
90	0.0441	0.0164	0.0009	0.0005	0	0	0	0	80- 90	6.950	666.7	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0002	666.7	100,100
110	0	0	0	0	0.0014	0.0009	0.0005	0.0006	100-110	0.0001	666.7	100,100
120	0.0002	0.0004	0.0002	0.0007	0.0029	0.0026	0.0024	0.0029	110-120	0.0009	666.7	100,100
130	0.0017	0.0017	0.0022	0.0021	0.0041	0.0043	0.0039	0.0043	120-130	0.0020	666.7	100,100
140	0.0027	0.0027	0.0044	0.0035	0.0046	0.0048	0.0051	0.0055	130-140	0.0028	666.7	100,100
150	0.0039	0.0040	0.0044	0.0044	0.0046	0.0046	0.0051	0.0055	140-150	0.0028	666.7	100,100
160	0.0041	0.0043	0.0049	0.0044	0.0039	0.0044	0.0051	0.0052	150-160	0.0021	666.7	100,100
170	0.0041	0.0041	0.0044	0.0041	0.0029	0.0022	0.0037	0.0040	160-170	0.0012	666.7	100,100
180	0.0007	0.0001	0	0	0.0002	0.0006	0	0	170-180	0.0002	666.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

LUMINANCE LIMITATION CURVES

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

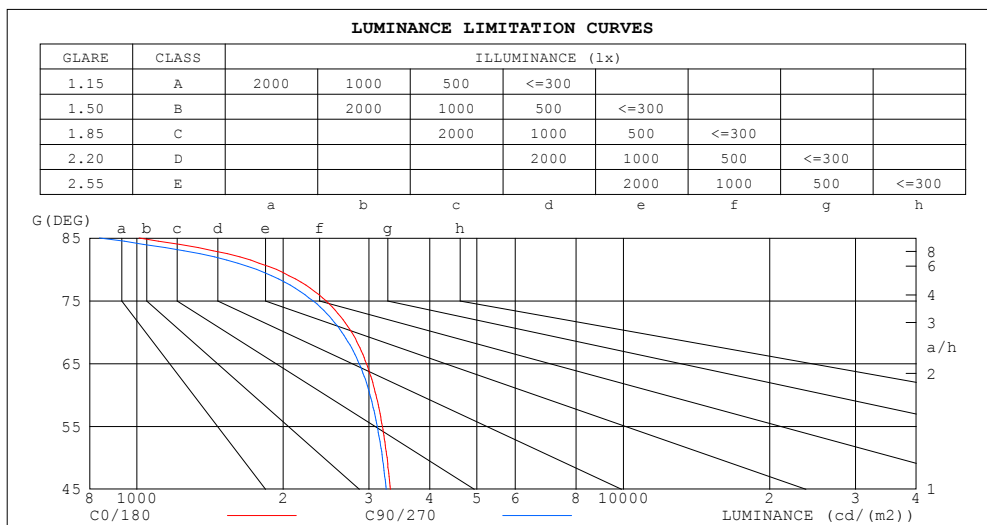


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.00	.97	1.02	.98	.95	.98	.95	.92	.94	.92	.89	.91	.88	.87	.85
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.79	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.59
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.47	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.29	.42	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.37	.31	.26	.25

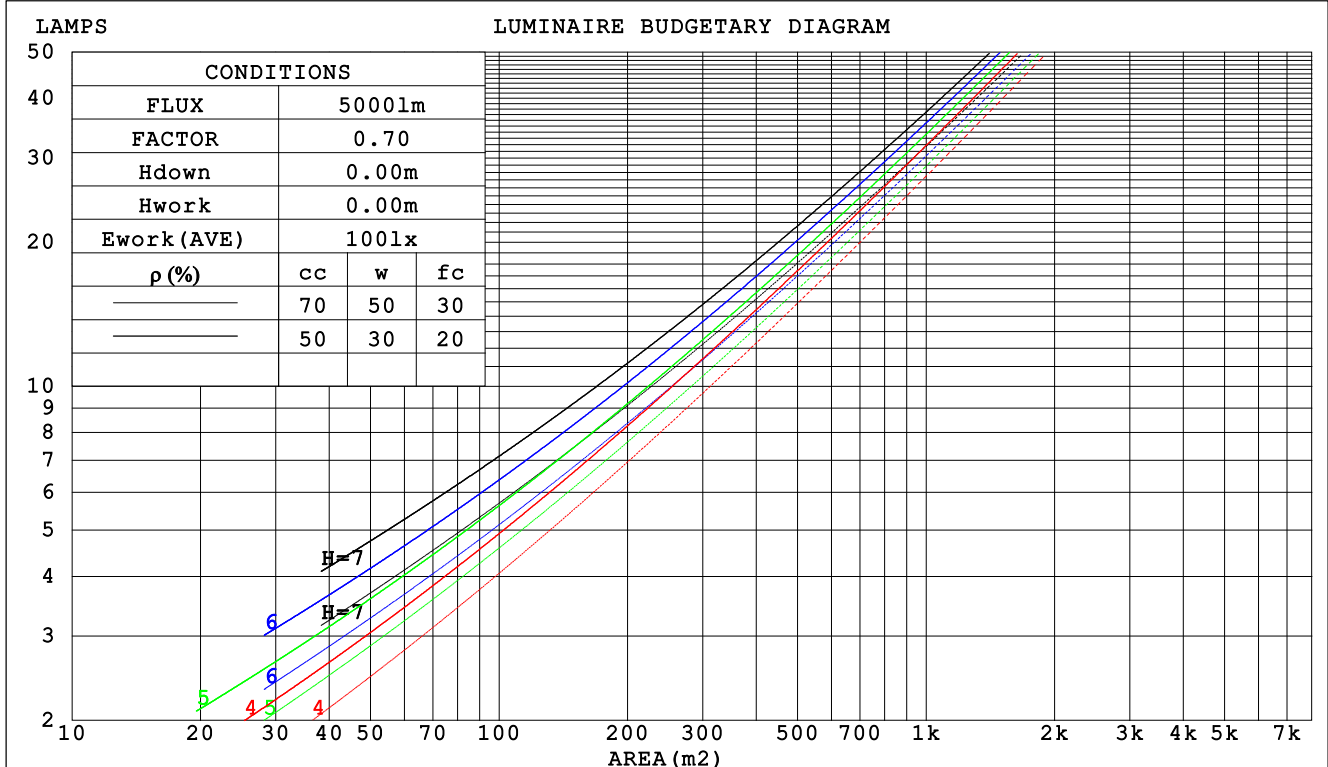

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 24.3DEG
 Operators:
 Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
 Humidity: 35.2%
 Test Distance:1.900m [K=1.0765]
 Remarks: C2108-44 uv筒灯 方形 2700k

WEC AND CCEC

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.298 .169 .054	.290 .166 .053	.277 .159 .051	.265 .153 .049	.254 .147 .047	
2.0	.284 .156 .048	.278 .153 .047	.266 .148 .046	.256 .143 .045	.246 .139 .044	
3.0	.265 .141 .042	.260 .139 .042	.249 .135 .041	.240 .131 .040	.231 .128 .040	
4.0	.246 .128 .038	.241 .126 .037	.232 .123 .037	.223 .120 .036	.215 .117 .036	
5.0	.228 .116 .034	.224 .115 .033	.215 .112 .033	.208 .110 .033	.201 .107 .032	
6.0	.212 .106 .030	.208 .105 .030	.201 .103 .030	.194 .101 .030	.188 .099 .029	
7.0	.197 .098 .028	.194 .097 .028	.188 .095 .027	.181 .093 .027	.176 .091 .027	
8.0	.185 .090 .025	.181 .089 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.173 .084 .023	.170 .083 .023	.165 .082 .023	.160 .080 .023	.156 .079 .023	
10.0	.163 .078 .022	.160 .077 .022	.156 .076 .021	.151 .075 .021	.147 .074 .021	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.179 .156 .135	.154 .134 .116	.105 .092 .081	.060 .053 .047	.019 .017 .015	
2.0	.171 .132 .099	.147 .114 .086	.101 .079 .060	.058 .046 .035	.019 .015 .011	
3.0	.164 .114 .075	.140 .099 .065	.096 .068 .046	.056 .040 .027	.018 .013 .009	
4.0	.156 .101 .059	.134 .087 .051	.092 .061 .036	.053 .036 .021	.017 .012 .007	
5.0	.149 .090 .048	.128 .078 .041	.088 .055 .029	.051 .032 .017	.016 .010 .006	
6.0	.142 .082 .039	.122 .071 .034	.084 .050 .024	.049 .029 .014	.016 .010 .005	
7.0	.135 .075 .033	.116 .065 .029	.080 .046 .021	.047 .027 .012	.015 .009 .004	
8.0	.128 .069 .029	.111 .060 .025	.077 .042 .018	.045 .025 .011	.014 .008 .004	
9.0	.122 .064 .025	.106 .056 .022	.073 .039 .016	.043 .023 .009	.014 .008 .003	
10.0	.117 .060 .023	.101 .052 .020	.070 .037 .014	.041 .022 .008	.013 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

UGR(Unified Glare Rating) Table

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm										
NAME: C2108-44 uv筒灯 方形 2700k					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.1	18.6	17.3	18.8	19.0	17.0	18.5	17.2	18.7	18.9
3H	18.6	19.9	18.8	20.2	20.4	18.4	19.8	18.7	20.0	20.3
4H	19.1	20.4	19.4	20.7	20.9	18.9	20.2	19.2	20.5	20.7
6H	19.4	20.7	19.7	20.9	21.2	19.2	20.4	19.5	20.7	21.0
8H	19.5	20.7	19.8	21.0	21.2	19.2	20.5	19.6	20.7	21.0
12H	19.5	20.6	19.8	20.9	21.2	19.2	20.4	19.6	20.7	21.0
4H 2H	17.7	19.0	18.0	19.2	19.5	17.6	18.9	17.9	19.2	19.4
3H	19.3	20.5	19.7	20.8	21.1	19.2	20.3	19.5	20.6	20.9
4H	20.0	21.0	20.3	21.3	21.7	19.8	20.9	20.2	21.2	21.5
6H	20.4	21.3	20.8	21.7	22.0	20.2	21.1	20.6	21.5	21.8
8H	20.5	21.3	20.9	21.7	22.1	20.3	21.1	20.7	21.5	21.9
12H	20.5	21.3	20.9	21.7	22.1	20.3	21.1	20.7	21.5	21.9
8H 4H	20.2	21.0	20.6	21.4	21.8	20.0	20.9	20.4	21.3	21.6
6H	20.7	21.4	21.1	21.8	22.3	20.5	21.2	21.0	21.6	22.1
8H	20.9	21.5	21.3	21.9	22.4	20.7	21.3	21.1	21.7	22.2
12H	20.9	21.5	21.4	21.9	22.4	20.7	21.2	21.2	21.7	22.2
12H 4H	20.2	21.0	20.6	21.3	21.7	20.0	20.8	20.5	21.2	21.6
6H	20.7	21.4	21.2	21.8	22.2	20.6	21.2	21.0	21.6	22.1
8H	20.9	21.4	21.4	21.9	22.4	20.7	21.2	21.2	21.7	22.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 666.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.4)
Area: 0.07 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

UTILIZATION FACTORS TABLE

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	58	75	65	58	73	66	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	104	101	107	103	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

ISOCANDELA DIAGRAM

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

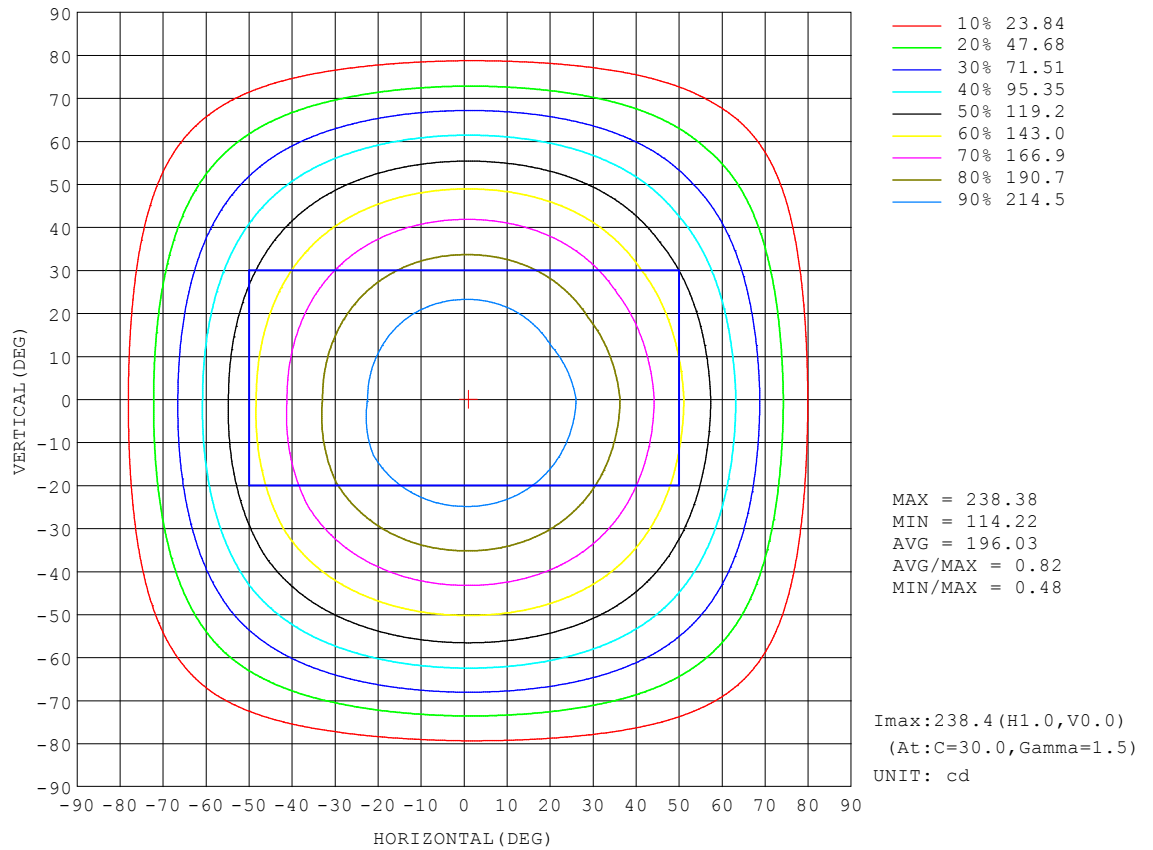


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date: 2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance: 1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

AAI Figure

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

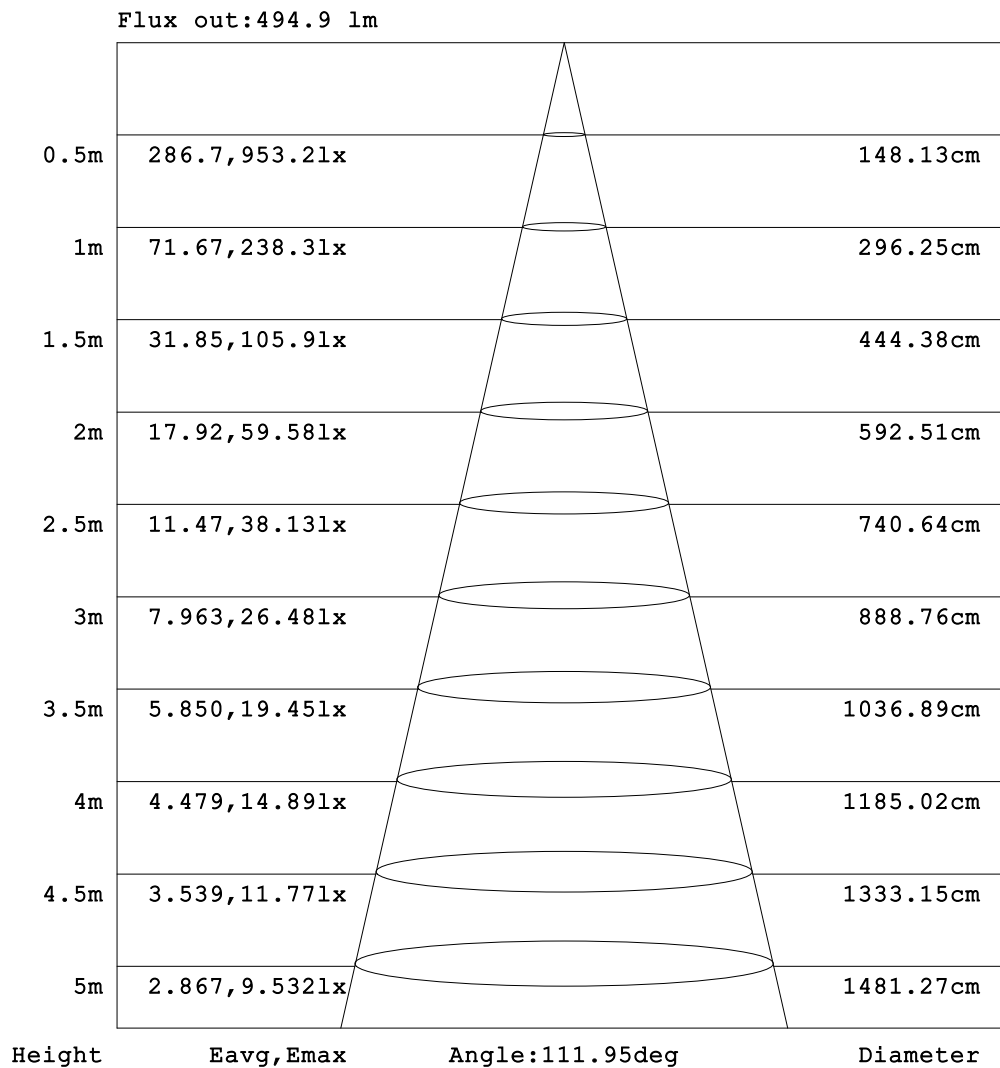


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

ISOLUX DIAGRAM

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

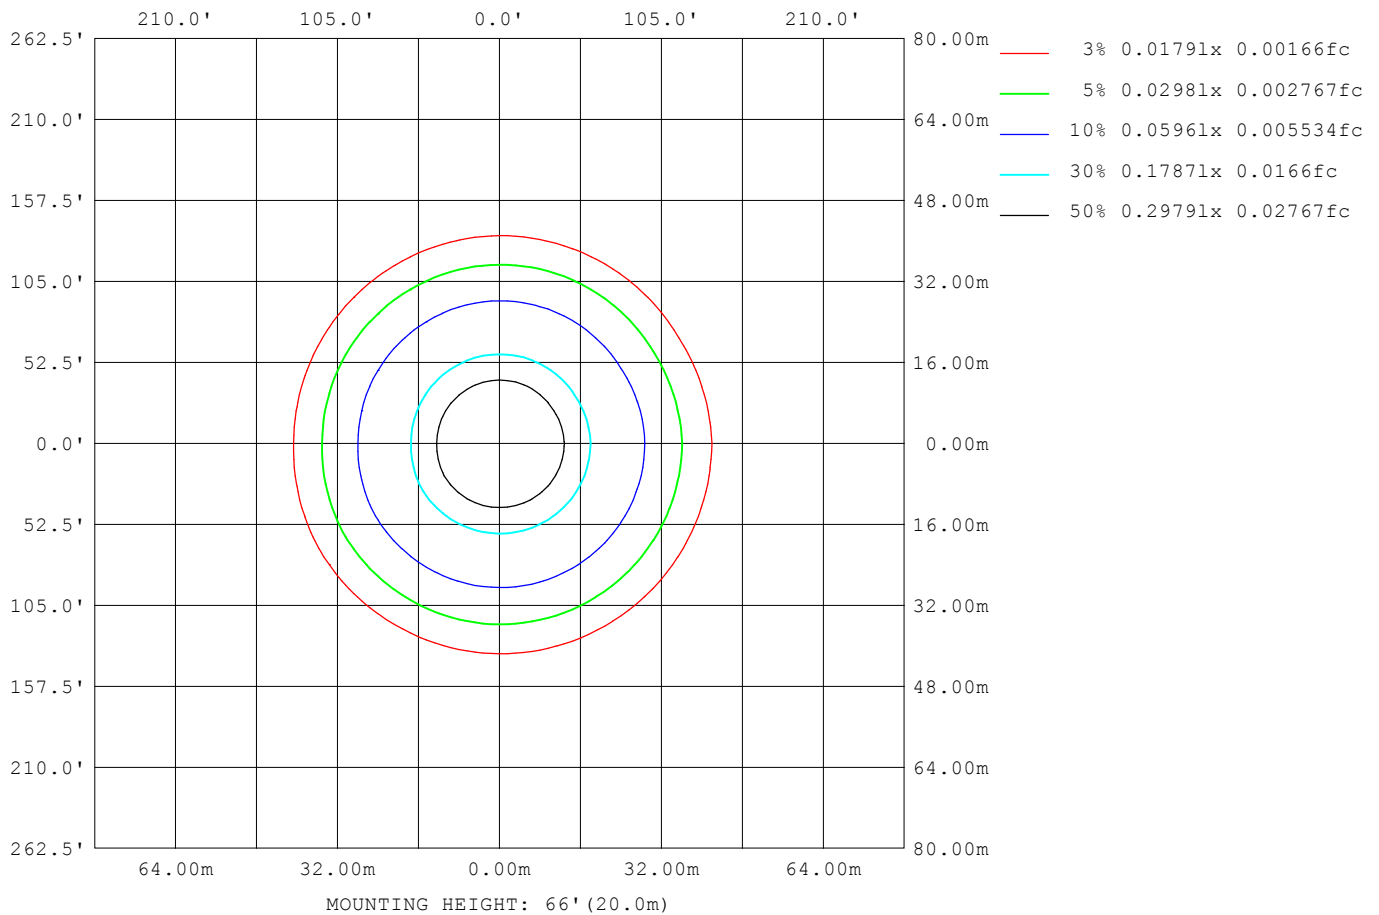

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 24.3DEG
 Operators:
 Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
 Humidity: 35.2%
 Test Distance:1.900m [K=1.0765]
 Remarks: C2108-44 uv筒灯 方形 2700k

LED Avg.L Report

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2799
L_0~180 (75) av	2217
L_0~180 (85) av	693
L_90~270 (65) av	2792
L_90~270 (75) av	2216
L_90~270 (85) av	704
L_45 (65) av	2778
L_45 (75) av	2180
L_45 (85) av	709

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 24.3DEG
 Operators:
 Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
 Humidity: 35.2%
 Test Distance:1.900m [K=1.0765]
 Remarks: C2108-44 uv筒灯 方形 2700k

Planar Illuminance Curve

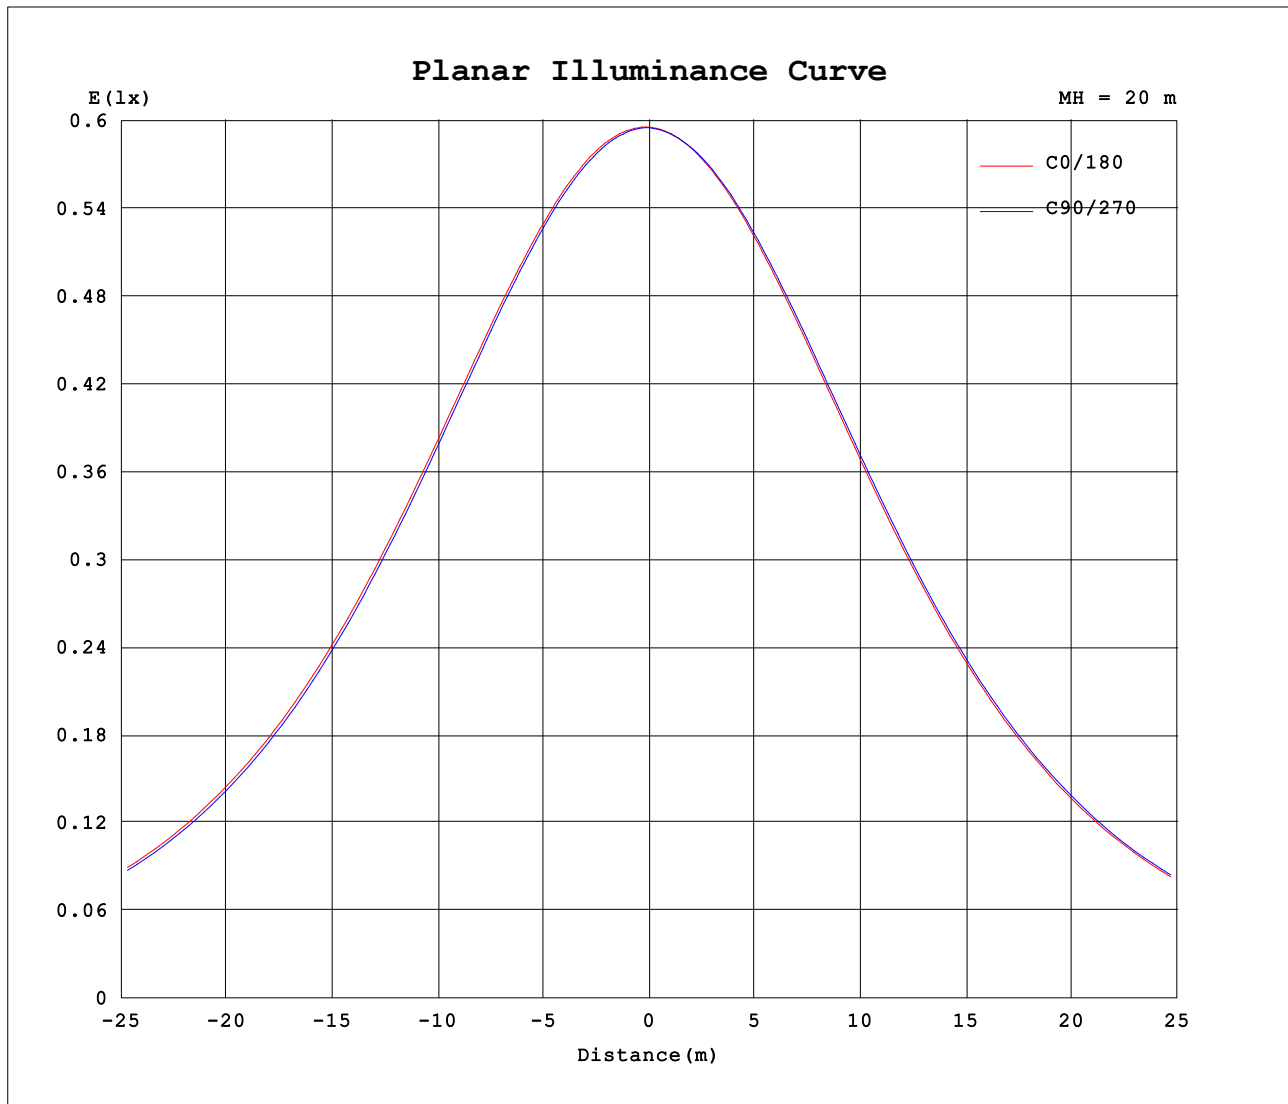

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date: 2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance: 1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.08V I:0.1322A P:15.396W PF:0.9697 Freq:60.01Hz Lamp Flux:666.736x1 lm		
NAME: C2108-44 uv筒灯 方形 2700k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	238	238	238	238	238	238	238	238	238	238	238	238						
5	238	238	238	237	237	237	236	236	237	236	237	237						
10	235	235	235	235	235	234	232	233	233	233	233	233						
15	231	231	230	230	230	229	227	227	228	228	228	228						
20	225	224	224	223	223	223	219	219	220	220	221	221						
25	216	216	215	214	214	214	209	210	211	211	211	212						
30	206	206	205	204	203	203	198	199	199	200	201	201						
35	194	193	192	191	191	191	185	186	186	187	188	188						
40	180	179	178	177	176	176	170	171	172	173	173	174						
45	164	164	162	161	160	160	154	155	156	157	158	158						
50	147	146	145	144	143	143	137	138	138	139	140	141						
55	128	128	127	125	124	124	118	119	119	121	121	122						
60	109	107	107	106	104	104	98.5	99.0	99.7	101	102	102						
65	87.7	86.5	85.5	84.7	83.2	82.6	78.0	78.3	79.0	80.5	81.1	81.6						
70	66.1	64.7	63.9	63.2	61.6	60.8	56.9	57.0	57.9	59.5	60.0	60.5						
75	44.3	43.2	42.3	41.7	40.1	39.3	36.0	36.1	37.0	38.6	39.0	39.6						
80	23.5	22.8	22.1	21.4	20.0	19.2	16.7	17.0	17.8	19.1	19.6	20.0						
85	6.17	6.05	5.79	5.11	4.65	3.90	2.29	2.63	3.06	3.48	4.08	4.38						
90	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.01						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.2%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 2700k