


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 48.78 lm/W			
MODEL		I _{max} (cd)	263.8	S/MH (C0/180)	1.29
NOMINAL POWER (W)	15.1247	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	120.077	TOTAL FLUX (lm)	737.82	η UP, DN (C0-180)	0.0, 51.0
NOMINAL FLUX (lm)	737.818	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.077	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

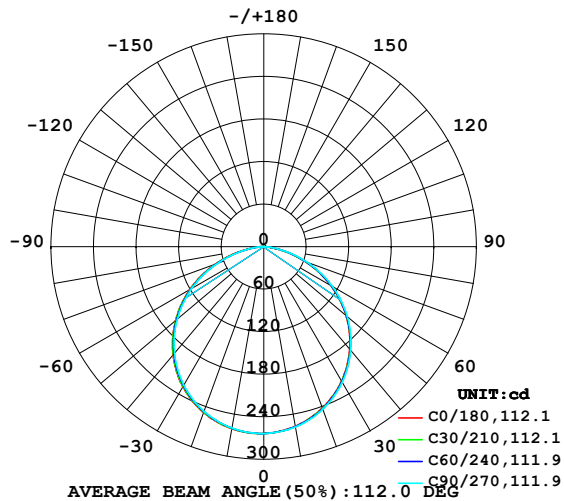

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

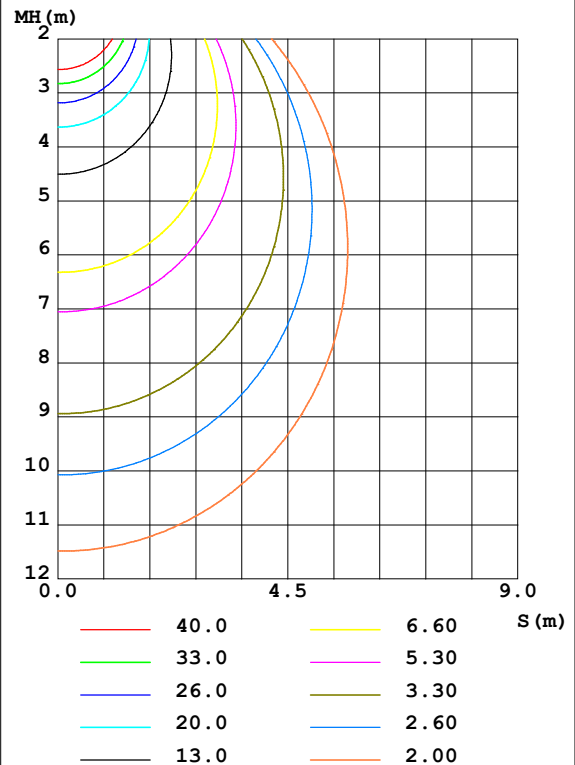

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date: 2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance: 1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	260.7	260.2	259.7	259.6	257.2	257.5	258.1	258.3	0- 10	24.94	24.94	3.38,3.38
20	248.8	248.0	247.1	246.6	242.1	243.0	243.8	244.6	10- 20	71.50	96.43	13.1,13.1
30	228.4	227.0	225.6	225.0	219.2	220.2	221.2	222.3	20- 30	108.6	205.0	27.8,27.8
40	199.1	197.9	196.0	195.3	188.6	189.7	190.7	192.3	30- 40	131.1	336.1	45.6,45.6
50	162.6	161.3	159.2	158.4	151.6	152.5	153.8	155.5	40- 50	135.8	471.9	64,64
60	120.1	118.4	116.8	115.2	109.1	109.8	111.6	112.8	50- 60	121.6	593.5	80.4,80.4
70	73.20	71.26	70.04	67.89	62.89	63.42	65.67	66.56	60- 70	90.06	683.5	92.6,92.6
80	25.98	24.79	23.70	21.72	18.44	19.17	20.94	21.79	70- 80	46.58	730.1	99,99
90	0.0542	0.0193	0.0022	0.0006	0	0	0	0	80- 90	7.706	737.8	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0003	737.8	100,100
110	0	0	0	0.0001	0.0019	0.0013	0.0007	0.0015	100-110	0.0002	737.8	100,100
120	0.0007	0.0010	0.0012	0.0011	0.0034	0.0033	0.0027	0.0034	110-120	0.0013	737.8	100,100
130	0.0022	0.0022	0.0034	0.0027	0.0049	0.0054	0.0049	0.0054	120-130	0.0028	737.8	100,100
140	0.0044	0.0043	0.0046	0.0041	0.0056	0.0056	0.0058	0.0066	130-140	0.0036	737.8	100,100
150	0.0046	0.0049	0.0061	0.0050	0.0056	0.0055	0.0068	0.0069	140-150	0.0034	737.8	100,100
160	0.0049	0.0050	0.0061	0.0055	0.0049	0.0050	0.0068	0.0068	150-160	0.0026	737.8	100,100
170	0.0056	0.0050	0.0054	0.0049	0.0037	0.0030	0.0039	0.0052	160-170	0.0015	737.8	100,100
180	0.0015	0.0006	0	0	0.0002	0.0011	0.0002	0	170-180	0.0003	737.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

LUMINANCE LIMITATION CURVES

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

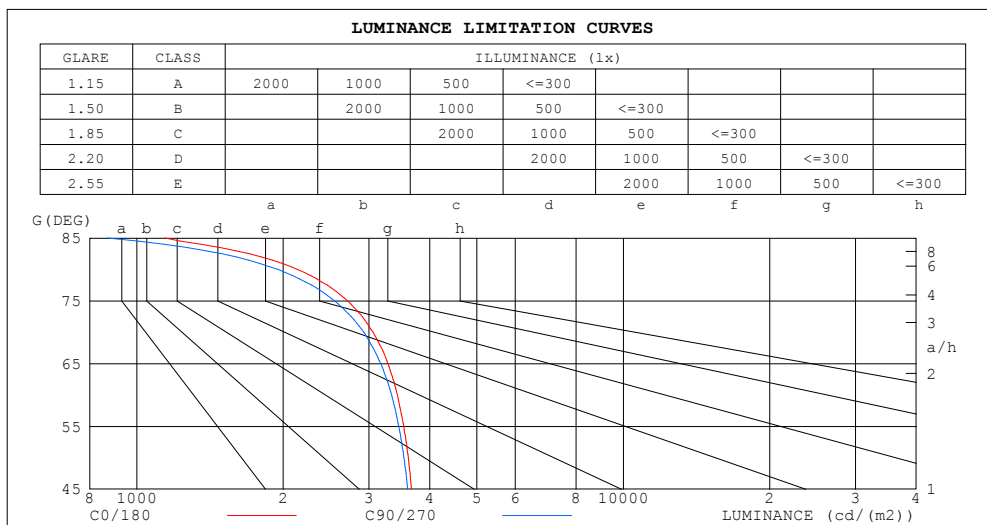


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

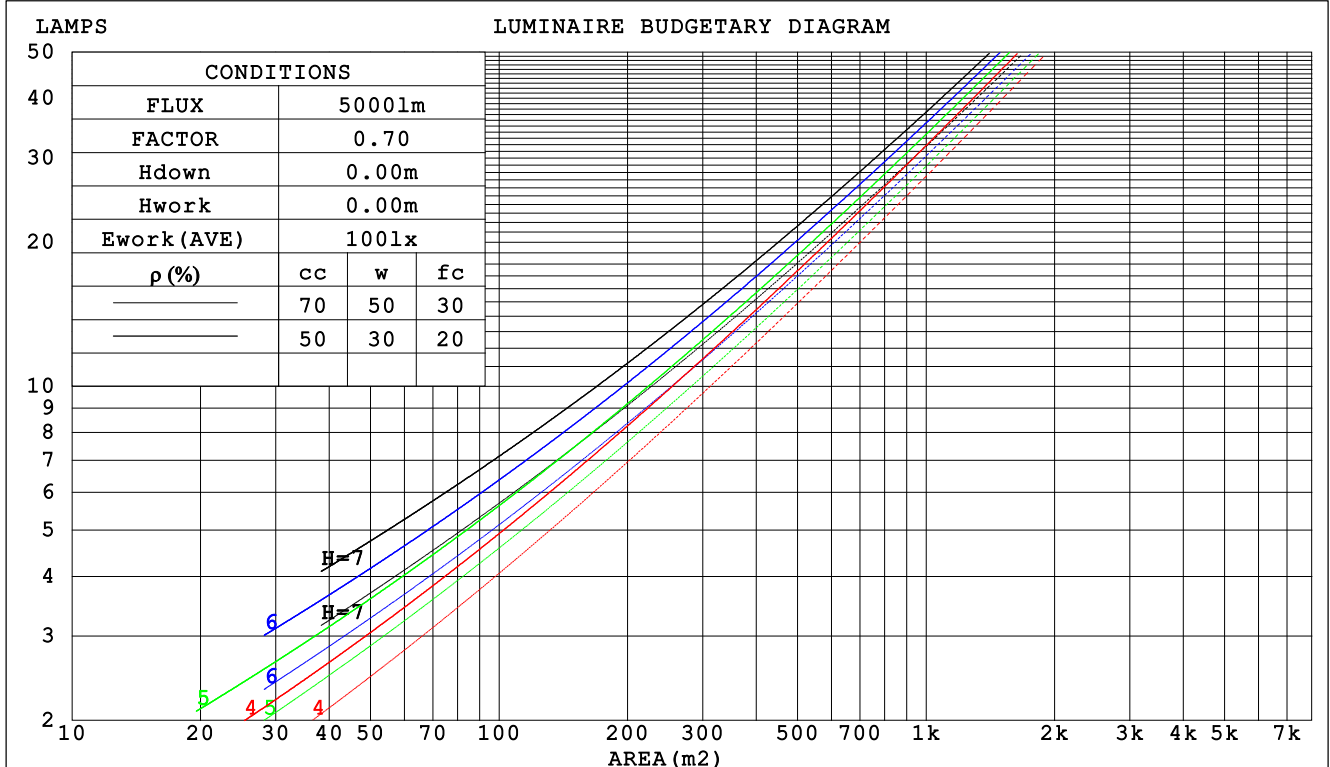

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

WEC AND CCEC

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.297 .169 .054	.290 .166 .053	.277 .159 .051	.265 .153 .049	.254 .147 .047	
2.0	.284 .156 .048	.278 .153 .047	.266 .148 .046	.256 .143 .045	.246 .139 .044	
3.0	.265 .141 .042	.260 .139 .042	.249 .135 .041	.240 .131 .040	.231 .128 .040	
4.0	.246 .128 .038	.241 .126 .037	.232 .123 .037	.223 .120 .036	.215 .117 .036	
5.0	.228 .116 .034	.224 .115 .033	.215 .112 .033	.208 .110 .033	.201 .107 .032	
6.0	.212 .106 .030	.208 .105 .030	.201 .103 .030	.194 .101 .030	.188 .099 .029	
7.0	.197 .098 .028	.194 .097 .028	.187 .095 .027	.181 .093 .027	.176 .091 .027	
8.0	.185 .090 .025	.181 .089 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.173 .084 .023	.170 .083 .023	.165 .082 .023	.160 .080 .023	.156 .079 .023	
10.0	.163 .078 .022	.160 .077 .022	.156 .076 .021	.151 .075 .021	.147 .074 .021	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.179 .156 .135	.154 .134 .116	.105 .092 .081	.060 .053 .047	.019 .017 .015	
2.0	.171 .132 .099	.147 .114 .086	.101 .079 .060	.058 .046 .035	.019 .015 .011	
3.0	.164 .114 .075	.140 .099 .065	.096 .068 .046	.056 .040 .027	.018 .013 .009	
4.0	.156 .101 .059	.134 .087 .051	.092 .061 .036	.053 .036 .021	.017 .012 .007	
5.0	.149 .091 .048	.128 .078 .041	.088 .055 .029	.051 .032 .017	.016 .010 .006	
6.0	.142 .082 .039	.122 .071 .034	.084 .050 .024	.049 .029 .014	.016 .010 .005	
7.0	.135 .075 .033	.116 .065 .029	.080 .046 .021	.047 .027 .012	.015 .009 .004	
8.0	.128 .069 .029	.111 .060 .025	.077 .042 .018	.045 .025 .011	.014 .008 .004	
9.0	.122 .064 .025	.106 .056 .022	.073 .039 .016	.043 .023 .009	.014 .008 .003	
10.0	.117 .060 .023	.101 .052 .020	.070 .037 .014	.041 .022 .008	.013 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

UGR(Unified Glare Rating) Table

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm										
NAME: C2108-44 uv筒灯 方形 3000k						TYPE:		WEIGHT:		
SPEC.:						DIM.:		SERIAL No.:		
MFR.:						SUR.:		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.4	18.9	17.7	19.1	19.3	17.3	18.8	17.6	19.0	19.2
3H	18.9	20.3	19.2	20.5	20.8	18.8	20.1	19.1	20.4	20.6
4H	19.4	20.8	19.8	21.0	21.3	19.3	20.6	19.6	20.8	21.1
6H	19.8	21.0	20.1	21.3	21.6	19.6	20.8	19.9	21.1	21.4
8H	19.8	21.0	20.2	21.3	21.6	19.6	20.8	19.9	21.1	21.4
12H	19.8	21.0	20.2	21.3	21.6	19.6	20.7	19.9	21.0	21.3
4H 2H	18.0	19.3	18.3	19.6	19.8	17.9	19.3	18.2	19.5	19.8
3H	19.7	20.8	20.0	21.1	21.4	19.5	20.7	19.9	21.0	21.3
4H	20.3	21.4	20.7	21.7	22.0	20.2	21.2	20.5	21.5	21.9
6H	20.7	21.7	21.1	22.0	22.4	20.5	21.5	20.9	21.8	22.2
8H	20.8	21.7	21.2	22.1	22.5	20.6	21.5	21.0	21.9	22.2
12H	20.9	21.7	21.3	22.0	22.4	20.6	21.4	21.1	21.8	22.2
8H 4H	20.5	21.4	20.9	21.8	22.1	20.4	21.2	20.8	21.6	22.0
6H	21.1	21.8	21.5	22.2	22.6	20.9	21.6	21.3	22.0	22.4
8H	21.2	21.8	21.7	22.3	22.7	21.0	21.6	21.5	22.1	22.5
12H	21.3	21.8	21.7	22.3	22.7	21.0	21.6	21.5	22.0	22.5
12H 4H	20.5	21.3	20.9	21.7	22.1	20.4	21.2	20.8	21.6	22.0
6H	21.1	21.7	21.5	22.1	22.6	20.9	21.5	21.4	22.0	22.4
8H	21.2	21.8	21.7	22.2	22.7	21.1	21.6	21.5	22.0	22.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 737.8 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.1)
Area: 0.07 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

UTILIZATION FACTORS TABLE

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	58	75	65	58	73	66	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	104	101	107	103	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

ISOCANDELA DIAGRAM

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

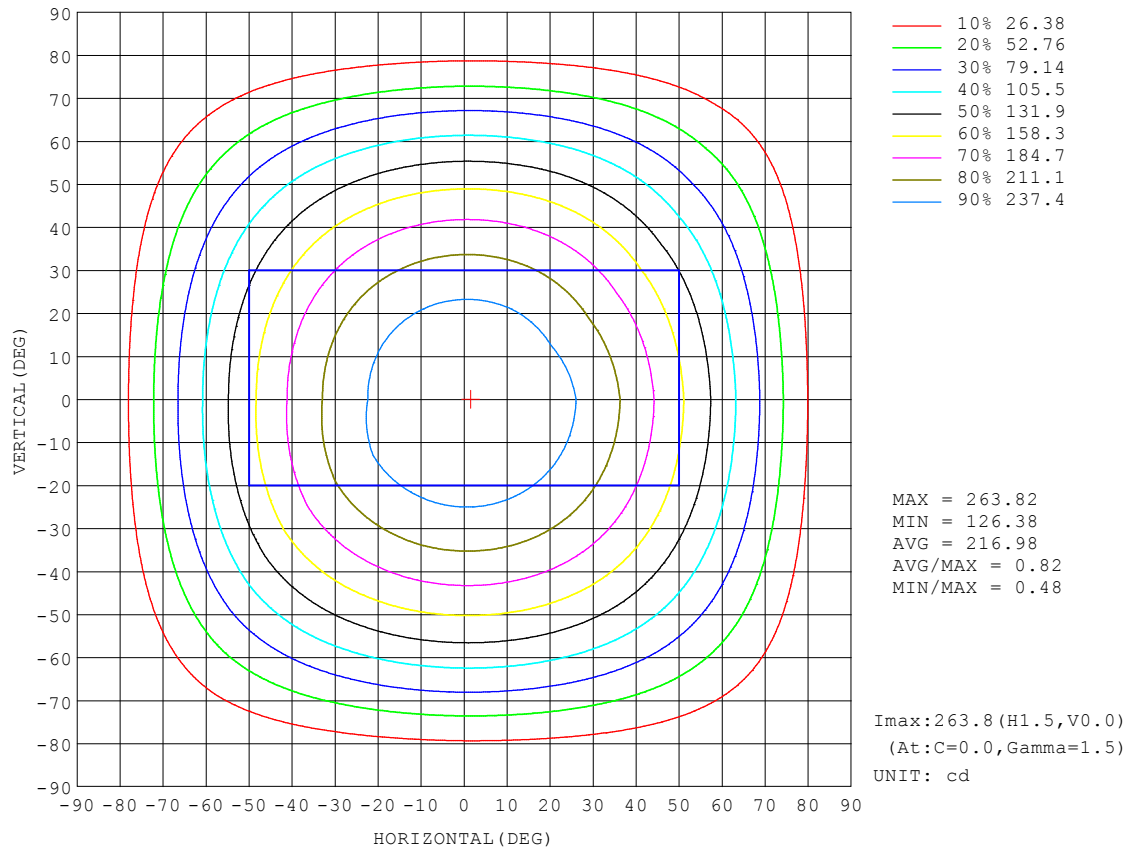


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

AAI Figure

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

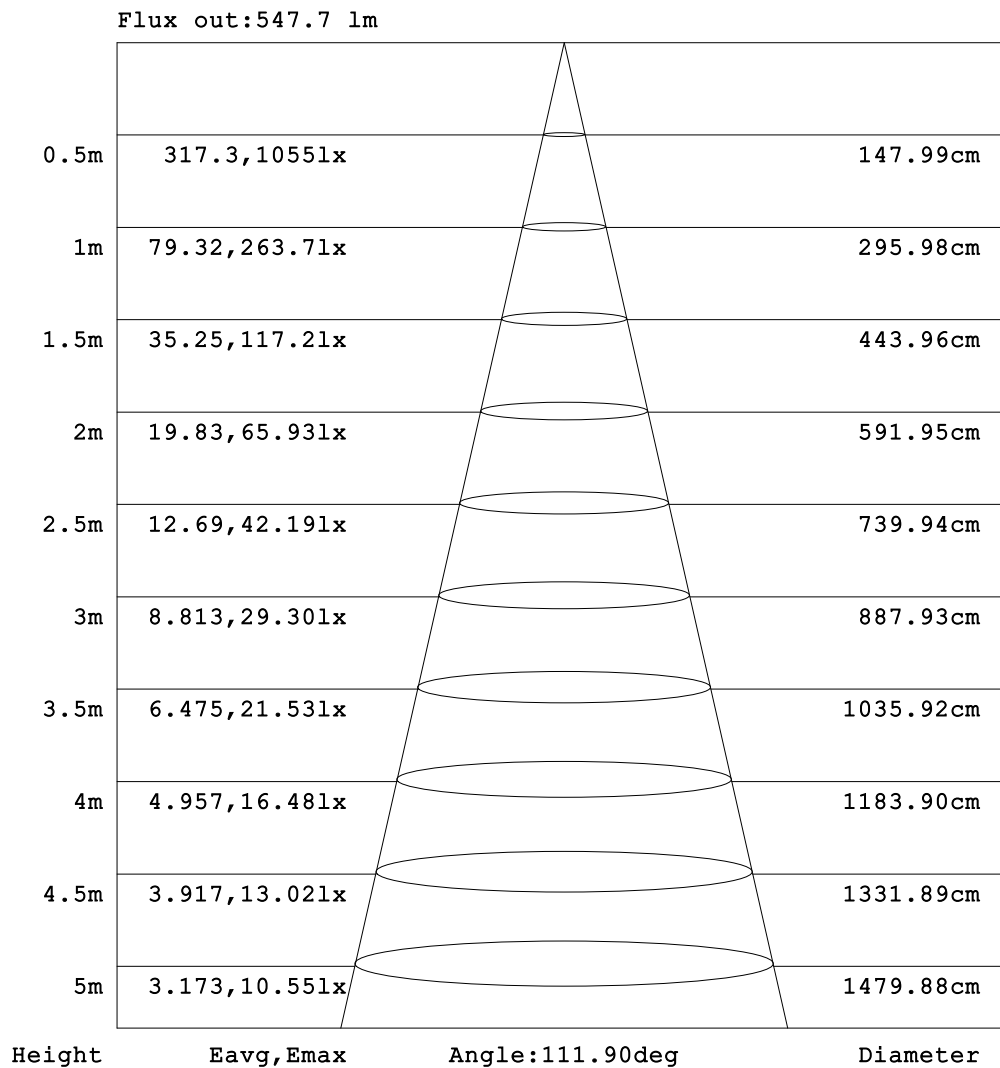


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

ISOLUX DIAGRAM

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

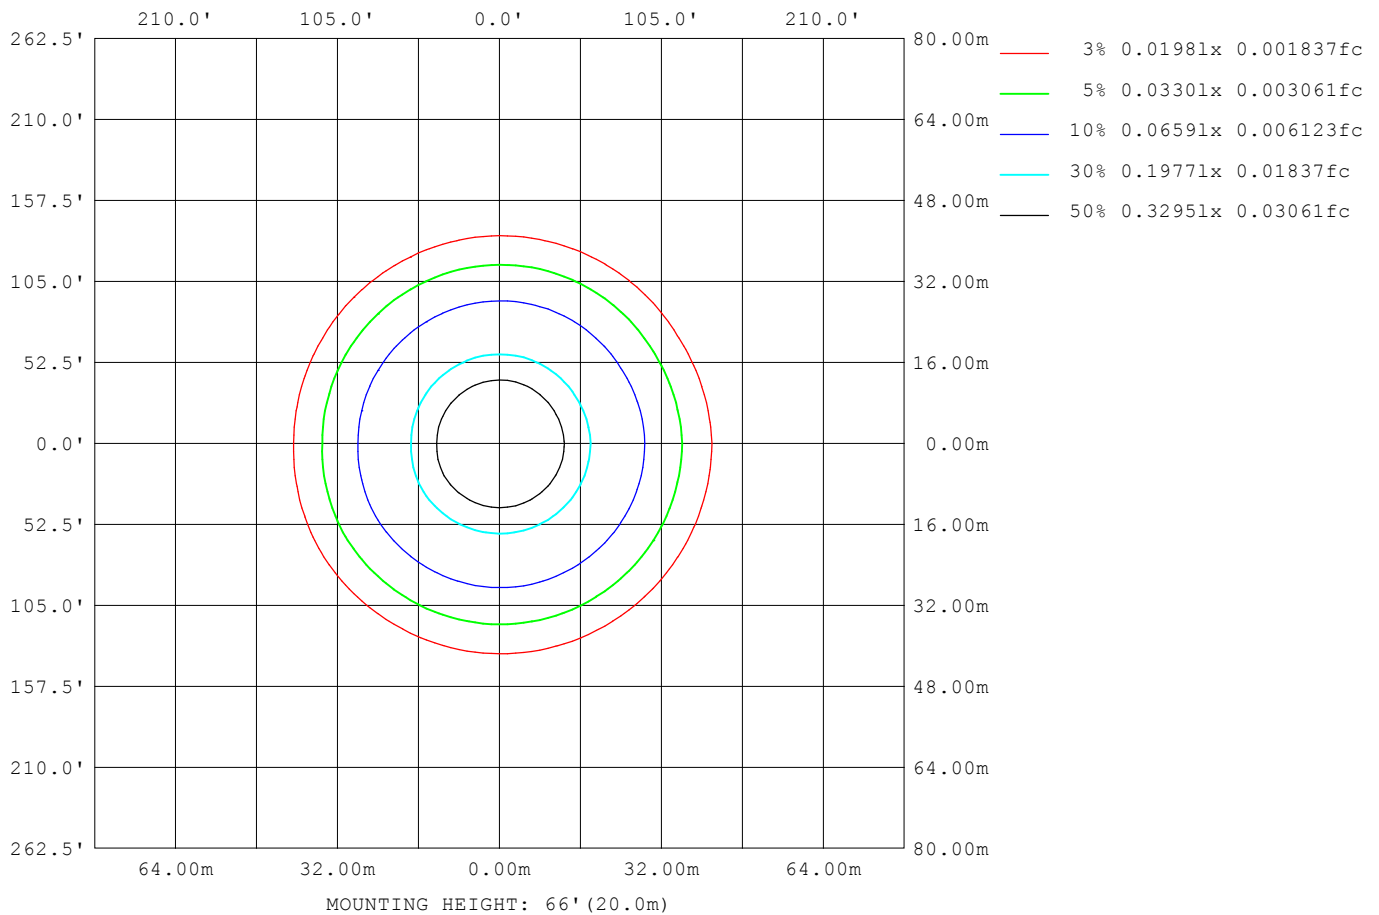

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

LED Avg.L Report

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3098
L_0~180 (75) av	2452
L_0~180 (85) av	780
L_90~270 (65) av	3089
L_90~270 (75) av	2449
L_90~270 (85) av	750
L_45 (65) av	3073
L_45 (75) av	2408
L_45 (85) av	790

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 24.3DEG
 Operators:
 Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
 Humidity: 35.5%
 Test Distance:1.900m [K=1.0765]
 Remarks: C2108-44 uv筒灯 方形 3000k

Planar Illuminance Curve

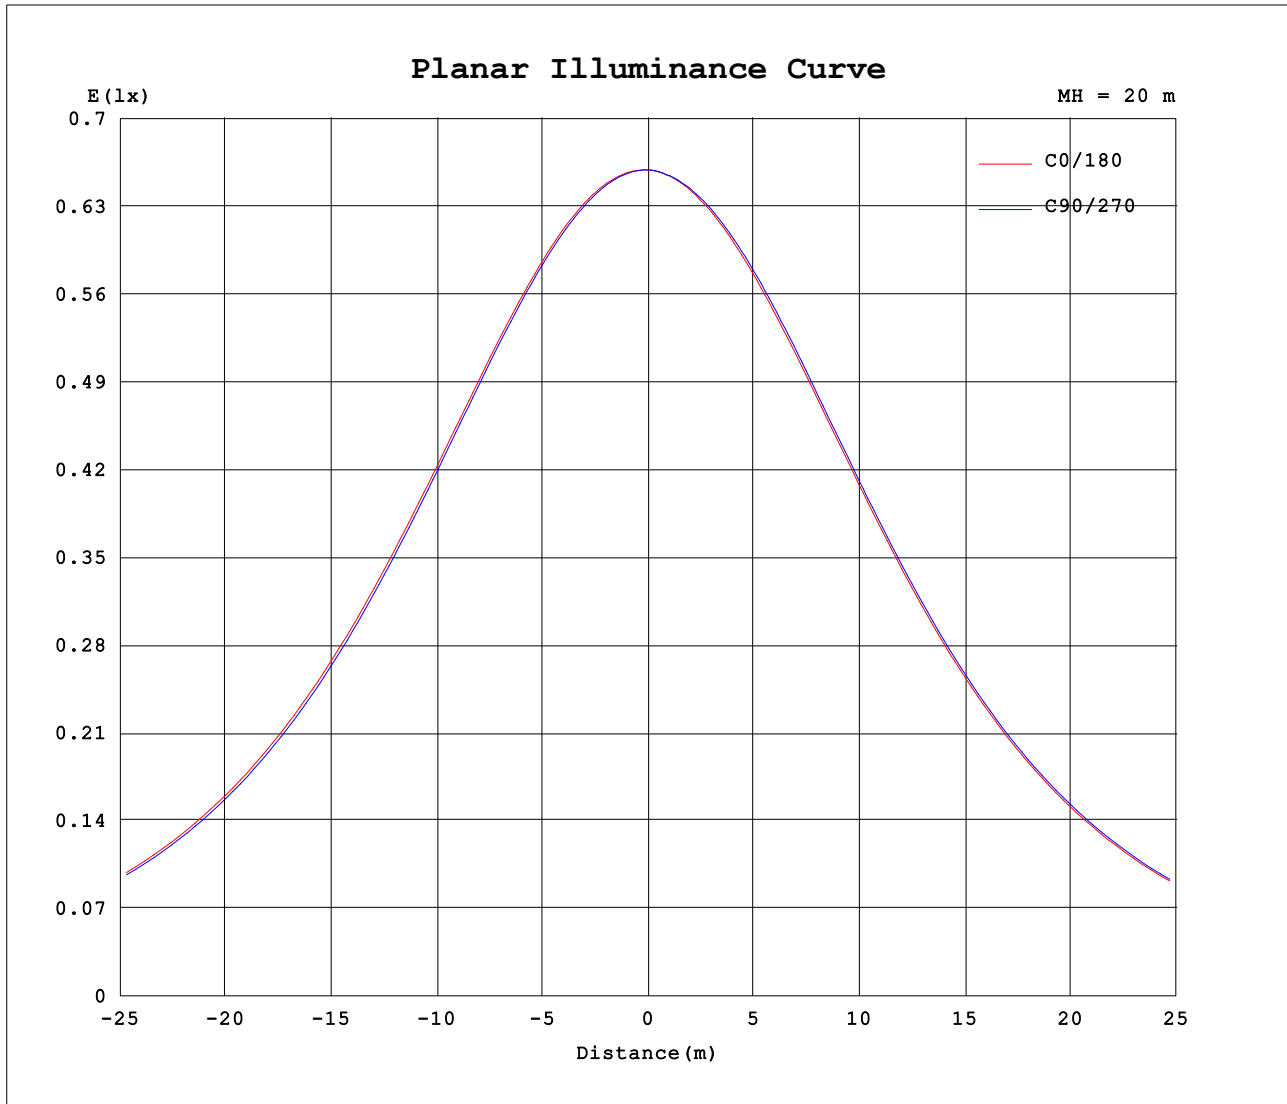

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date: 2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance: 1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.08V I:0.1300A P:15.125W PF:0.9689 Freq:60.01Hz Lamp Flux:737.818x1 lm		
NAME: C2108-44 uv筒灯 方形 3000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	264	264	264	264	264	264	264	264	264	264	264	264						
5	263	263	263	263	263	263	262	262	262	262	262	262						
10	261	260	260	260	260	260	257	257	258	258	258	258						
15	256	255	255	254	254	254	251	251	252	252	253	253						
20	249	248	248	247	247	247	242	243	243	244	245	245						
25	240	239	238	237	237	237	232	232	233	233	234	235						
30	228	228	226	226	225	225	219	220	220	221	222	223						
35	215	214	213	212	211	211	205	206	206	207	208	209						
40	199	199	197	196	195	195	189	189	190	191	192	193						
45	182	181	180	178	177	178	171	172	172	173	174	175						
50	163	162	161	159	158	159	152	152	153	154	155	156						
55	142	141	140	139	138	138	131	132	132	133	134	135						
60	120	119	118	117	115	115	109	109	110	112	113	113						
65	97.1	95.8	94.6	93.8	92.2	91.5	86.2	86.5	87.3	88.9	89.7	90.2						
70	73.2	71.9	70.7	70.0	68.3	67.5	62.9	62.9	63.9	65.7	66.3	66.8						
75	49.1	47.8	46.7	46.2	44.4	43.5	39.8	39.8	40.8	42.6	43.1	43.6						
80	26.0	25.2	24.4	23.7	22.2	21.3	18.4	18.7	19.6	20.9	21.5	22.0						
85	6.97	6.83	6.41	5.31	5.01	4.50	2.54	2.91	3.44	3.85	4.51	4.84						
90	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.01						
135	0.00	0.00	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
145	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
150	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
155	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01						
160	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01						
165	0.01	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01						
170	0.01	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01						
175	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.3DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 35.5%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 3000k