


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 53.12 lm/W			
MODEL		I _{max} (cd)	284.5	S/MH (C0/180)	1.29
NOMINAL POWER (W)	14.974	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	120.077	TOTAL FLUX (lm)	795.44	η UP, DN (C0-180)	0.0, 51.1
NOMINAL FLUX (lm)	795.442	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 48.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.077	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

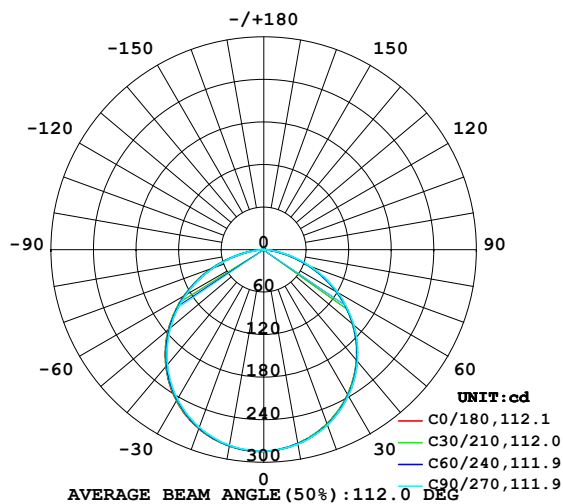

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

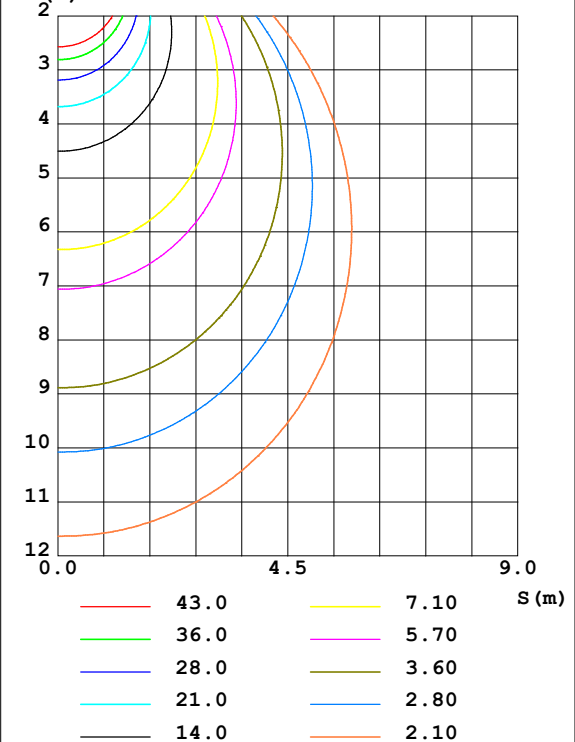

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 24.4DEG
 Operators:
 Test Date: 2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.416
 Humidity: 36.3%
 Test Distance: 1.900m [K=1.0765]
 Remarks: C2108-44 uv筒灯 方形 4000k

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	281.2	280.8	280.2	280.0	277.4	277.9	278.4	278.6	0- 10	26.90	26.90	3.38,3.38
20	268.5	267.5	266.5	266.0	261.2	262.3	263.0	263.6	10- 20	77.12	104.0	13.1,13.1
30	246.2	244.8	243.5	242.7	236.4	237.5	238.4	239.4	20- 30	117.1	221.1	27.8,27.8
40	214.9	213.4	211.3	210.6	203.4	204.5	205.7	207.0	30- 40	141.4	362.5	45.6,45.6
50	175.6	174.0	171.8	170.8	163.7	164.6	166.0	167.5	40- 50	146.4	508.9	64,64
60	129.6	127.7	126.0	124.1	117.6	118.4	120.3	121.4	50- 60	131.1	639.9	80.5,80.5
70	78.84	76.72	75.49	73.07	67.73	68.26	70.78	71.58	60- 70	97.03	737.0	92.6,92.6
80	28.04	26.65	25.55	23.40	19.83	20.50	22.53	23.33	70- 80	50.14	787.1	99,99
90	0.0638	0.0257	0.0039	0.0009	0	0	0	0	80- 90	8.306	795.4	100,100
100	0	0	0	0	0.0002	0	0	0	90-100	0.0003	795.4	100,100
110	0	0	0	0.0001	0.0025	0.0018	0.0020	0.0018	100-110	0.0004	795.4	100,100
120	0.0010	0.0018	0.0019	0.0018	0.0044	0.0040	0.0039	0.0041	110-120	0.0019	795.4	100,100
130	0.0034	0.0034	0.0039	0.0038	0.0061	0.0059	0.0056	0.0065	120-130	0.0034	795.4	100,100
140	0.0044	0.0046	0.0054	0.0051	0.0073	0.0066	0.0075	0.0078	130-140	0.0043	795.4	100,100
150	0.0058	0.0055	0.0066	0.0063	0.0073	0.0065	0.0090	0.0078	140-150	0.0040	795.4	100,100
160	0.0058	0.0060	0.0073	0.0067	0.0066	0.0061	0.0076	0.0077	150-160	0.0031	795.4	100,100
170	0.0058	0.0061	0.0059	0.0056	0.0041	0.0039	0.0056	0.0061	160-170	0.0018	795.4	100,100
180	0.0019	0.0006	0	0	0.0012	0.0013	0.0005	0	170-180	0.0004	795.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

LUMINANCE LIMITATION CURVES

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

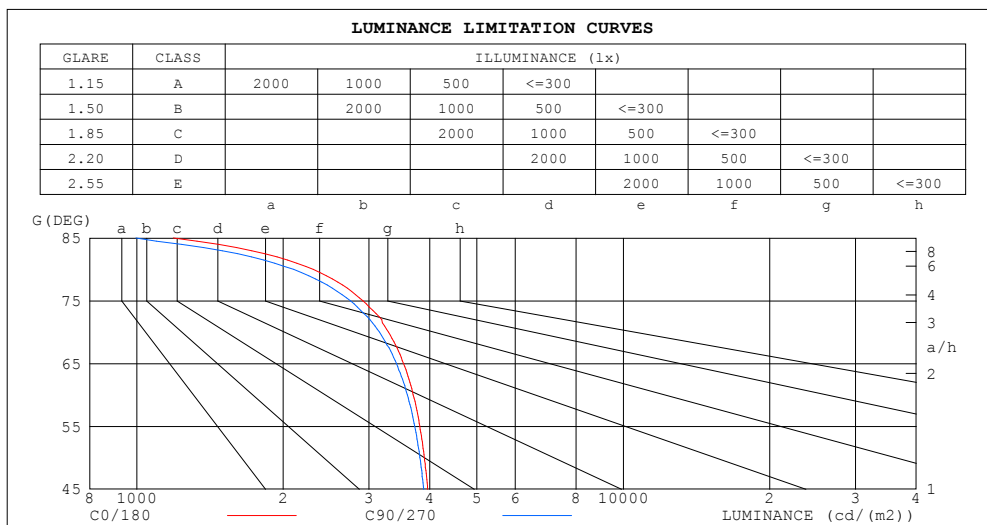

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1189	995
80	2305	2102
75	2915	2748
70	3291	3153
65	3535	3419
60	3701	3599
55	3817	3729
50	3900	3819
45	3961	3889


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

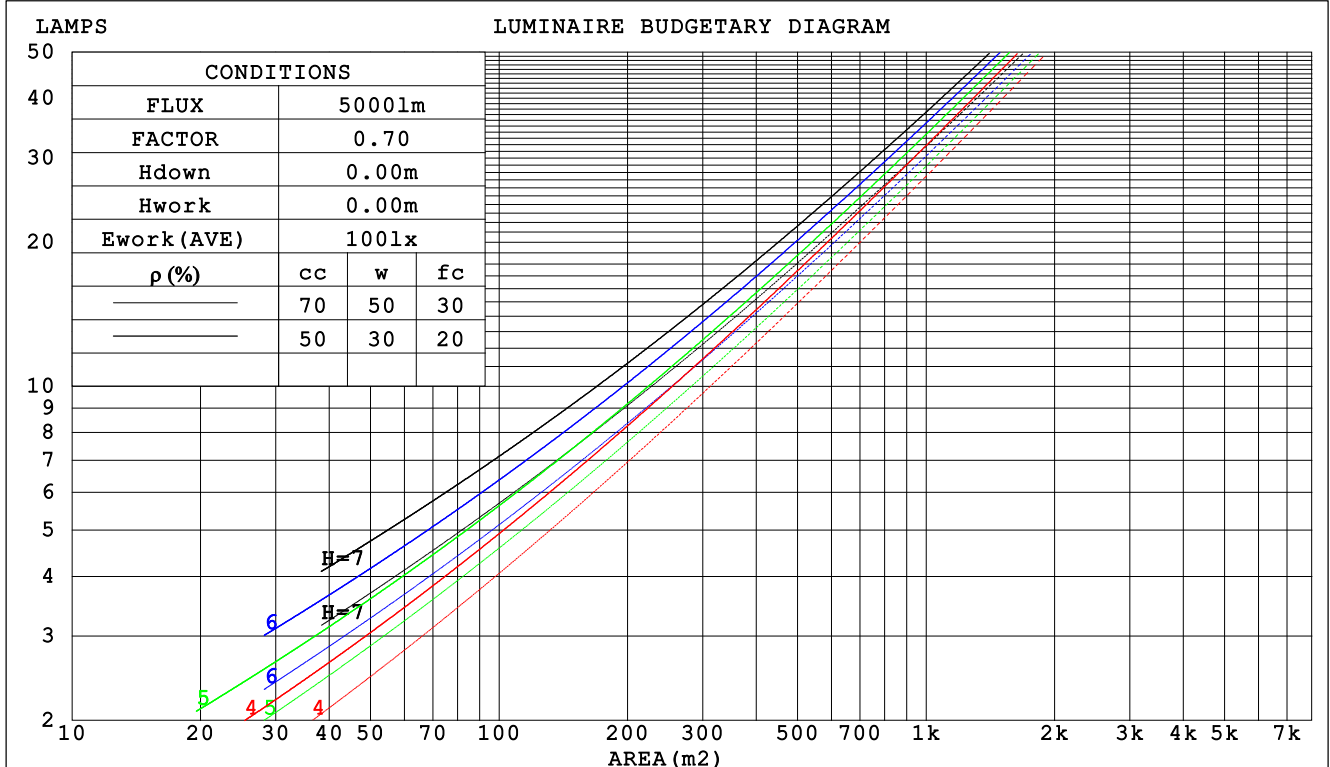

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

WEC AND CCEC

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.297 .169 .054	.290 .166 .053	.277 .159 .051	.265 .153 .049	.254 .147 .047	
2.0	.284 .156 .048	.278 .153 .047	.266 .148 .046	.256 .143 .045	.246 .139 .044	
3.0	.265 .141 .042	.260 .139 .042	.249 .135 .041	.240 .131 .040	.231 .128 .040	
4.0	.246 .128 .038	.241 .126 .037	.232 .123 .037	.223 .120 .036	.215 .117 .036	
5.0	.228 .116 .034	.223 .115 .033	.215 .112 .033	.208 .110 .033	.201 .107 .032	
6.0	.212 .106 .030	.208 .105 .030	.201 .103 .030	.194 .101 .030	.188 .099 .029	
7.0	.197 .098 .028	.194 .097 .028	.187 .095 .027	.181 .093 .027	.176 .091 .027	
8.0	.184 .090 .025	.181 .089 .025	.176 .088 .025	.170 .086 .025	.165 .085 .025	
9.0	.173 .084 .023	.170 .083 .023	.165 .082 .023	.160 .080 .023	.156 .079 .023	
10.0	.163 .078 .022	.160 .077 .022	.156 .076 .021	.151 .075 .021	.147 .074 .021	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.179 .156 .135	.154 .134 .117	.105 .092 .081	.060 .053 .047	.019 .017 .015	
2.0	.171 .132 .099	.147 .114 .086	.101 .079 .060	.058 .046 .035	.019 .015 .011	
3.0	.164 .114 .075	.140 .099 .065	.096 .068 .046	.056 .040 .027	.018 .013 .009	
4.0	.156 .101 .059	.134 .087 .051	.092 .061 .036	.053 .036 .021	.017 .012 .007	
5.0	.149 .091 .048	.128 .078 .041	.088 .055 .029	.051 .032 .017	.016 .010 .006	
6.0	.142 .082 .039	.122 .071 .034	.084 .050 .024	.049 .029 .014	.016 .010 .005	
7.0	.135 .075 .033	.116 .065 .029	.080 .046 .021	.047 .027 .012	.015 .009 .004	
8.0	.128 .069 .029	.111 .060 .025	.077 .042 .018	.045 .025 .011	.014 .008 .004	
9.0	.122 .064 .025	.105 .056 .022	.073 .039 .016	.043 .023 .009	.014 .008 .003	
10.0	.117 .060 .023	.101 .052 .020	.070 .037 .014	.041 .022 .008	.013 .007 .003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

UGR(Unified Glare Rating) Table

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm										
NAME: C2108-44 uv筒灯 方形 4000k						TYPE:			WEIGHT:	
SPEC.:						DIM.:			SERIAL No.:	
MFR.:						SUR.:			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.7	19.2	18.0	19.4	19.6	17.6	19.1	17.9	19.3	19.5
3H	19.2	20.6	19.5	20.8	21.0	19.0	20.4	19.3	20.6	20.9
4H	19.7	21.0	20.0	21.3	21.5	19.5	20.9	19.8	21.1	21.4
6H	20.0	21.3	20.4	21.5	21.8	19.8	21.1	20.1	21.3	21.6
8H	20.1	21.3	20.4	21.6	21.9	19.9	21.1	20.2	21.3	21.6
12H	20.1	21.2	20.4	21.5	21.8	19.9	21.0	20.2	21.3	21.6
4H 2H	18.3	19.6	18.6	19.8	20.1	18.2	19.5	18.5	19.8	20.0
3H	19.9	21.1	20.3	21.4	21.7	19.8	21.0	20.1	21.2	21.5
4H	20.6	21.6	20.9	21.9	22.3	20.4	21.5	20.8	21.8	22.1
6H	21.0	21.9	21.4	22.3	22.6	20.8	21.7	21.2	22.1	22.5
8H	21.1	22.0	21.5	22.3	22.7	20.9	21.7	21.3	22.1	22.5
12H	21.1	21.9	21.5	22.3	22.7	20.9	21.7	21.3	22.1	22.5
8H 4H	20.8	21.6	21.2	22.0	22.4	20.6	21.5	21.1	21.9	22.3
6H	21.3	22.0	21.8	22.4	22.9	21.1	21.9	21.6	22.3	22.7
8H	21.5	22.1	21.9	22.5	23.0	21.3	21.9	21.7	22.3	22.8
12H	21.5	22.1	22.0	22.5	23.0	21.3	21.9	21.8	22.3	22.8
12H 4H	20.8	21.6	21.2	22.0	22.4	20.6	21.4	21.1	21.8	22.2
6H	21.3	22.0	21.8	22.4	22.8	21.2	21.8	21.6	22.2	22.7
8H	21.5	22.0	22.0	22.5	23.0	21.3	21.9	21.8	22.3	22.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 795.4 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.8)
Area: 0.07 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

UTILIZATION FACTORS TABLE

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	58	75	65	58	73	66	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	104	101	107	103	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

ISOCANDELA DIAGRAM

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

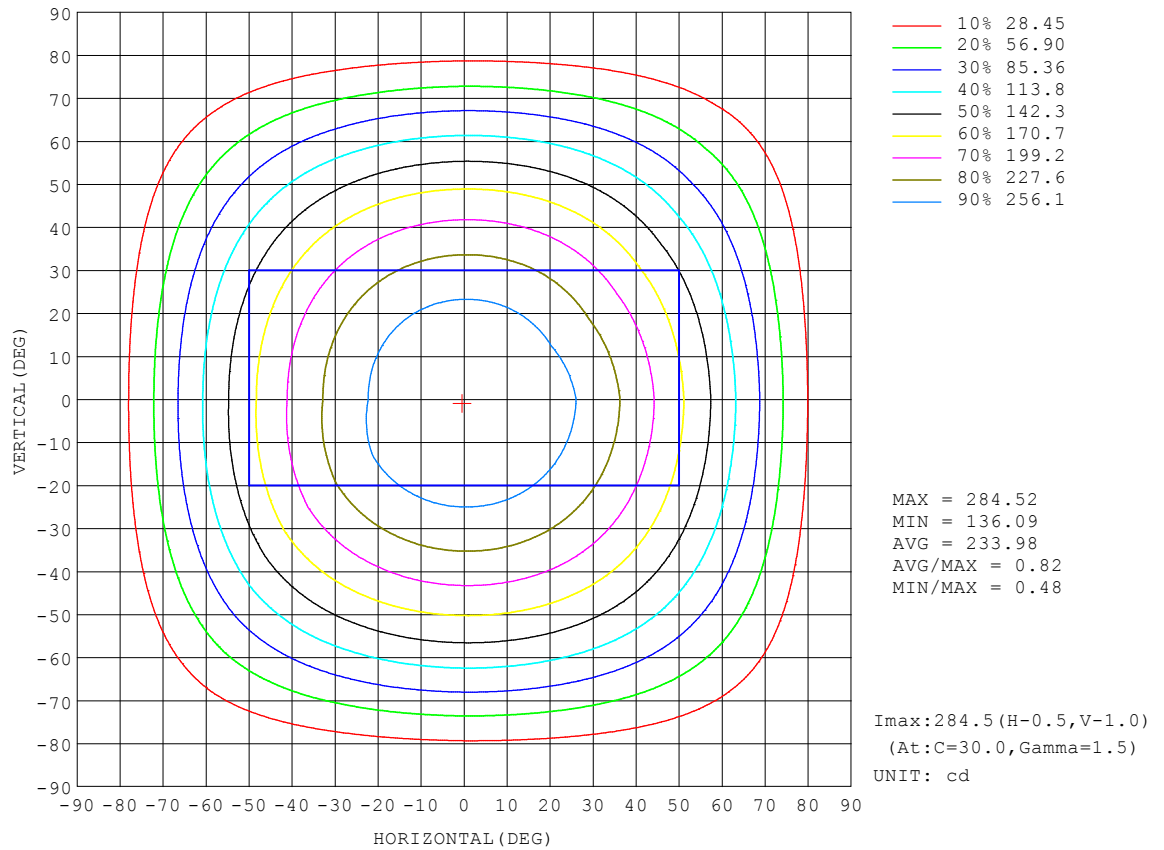


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

AAI Figure

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

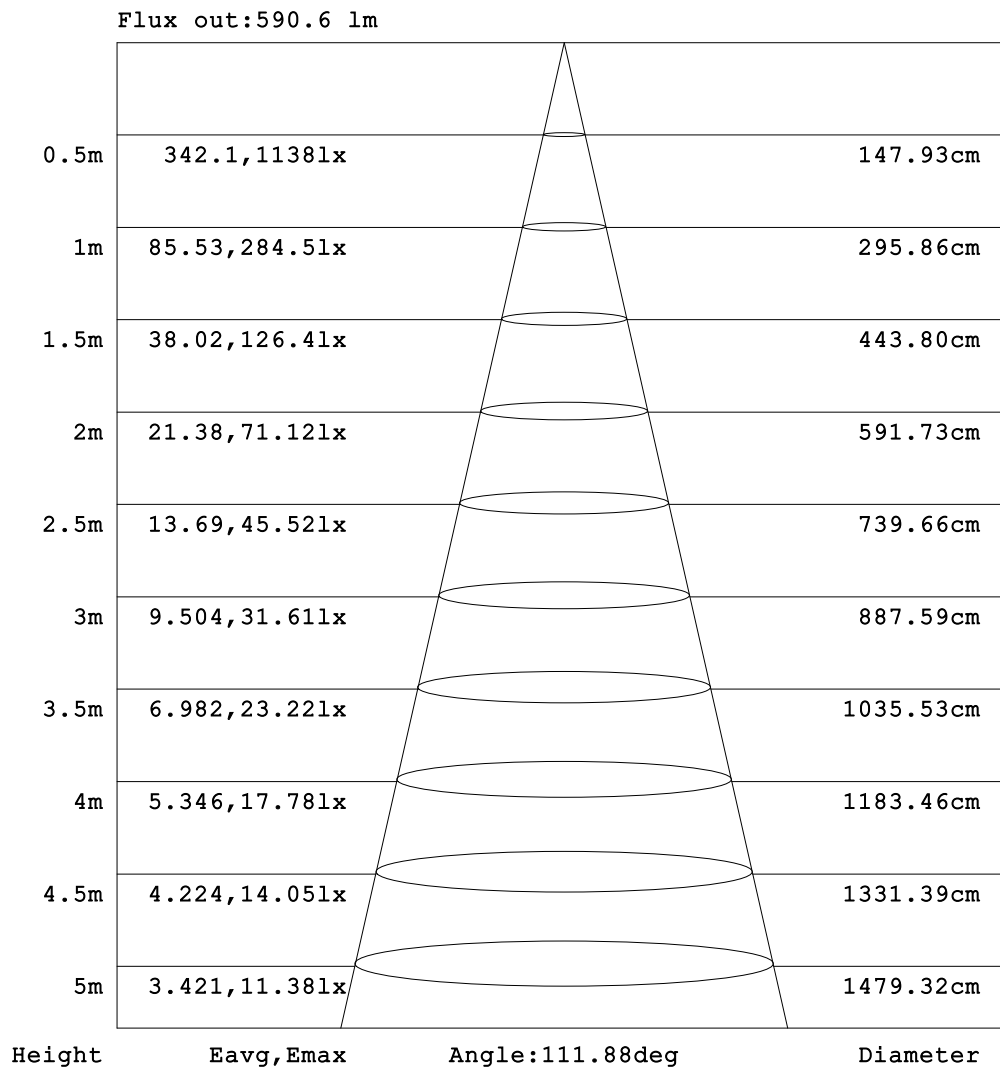


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date: 2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance: 1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

ISOLUX DIAGRAM

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

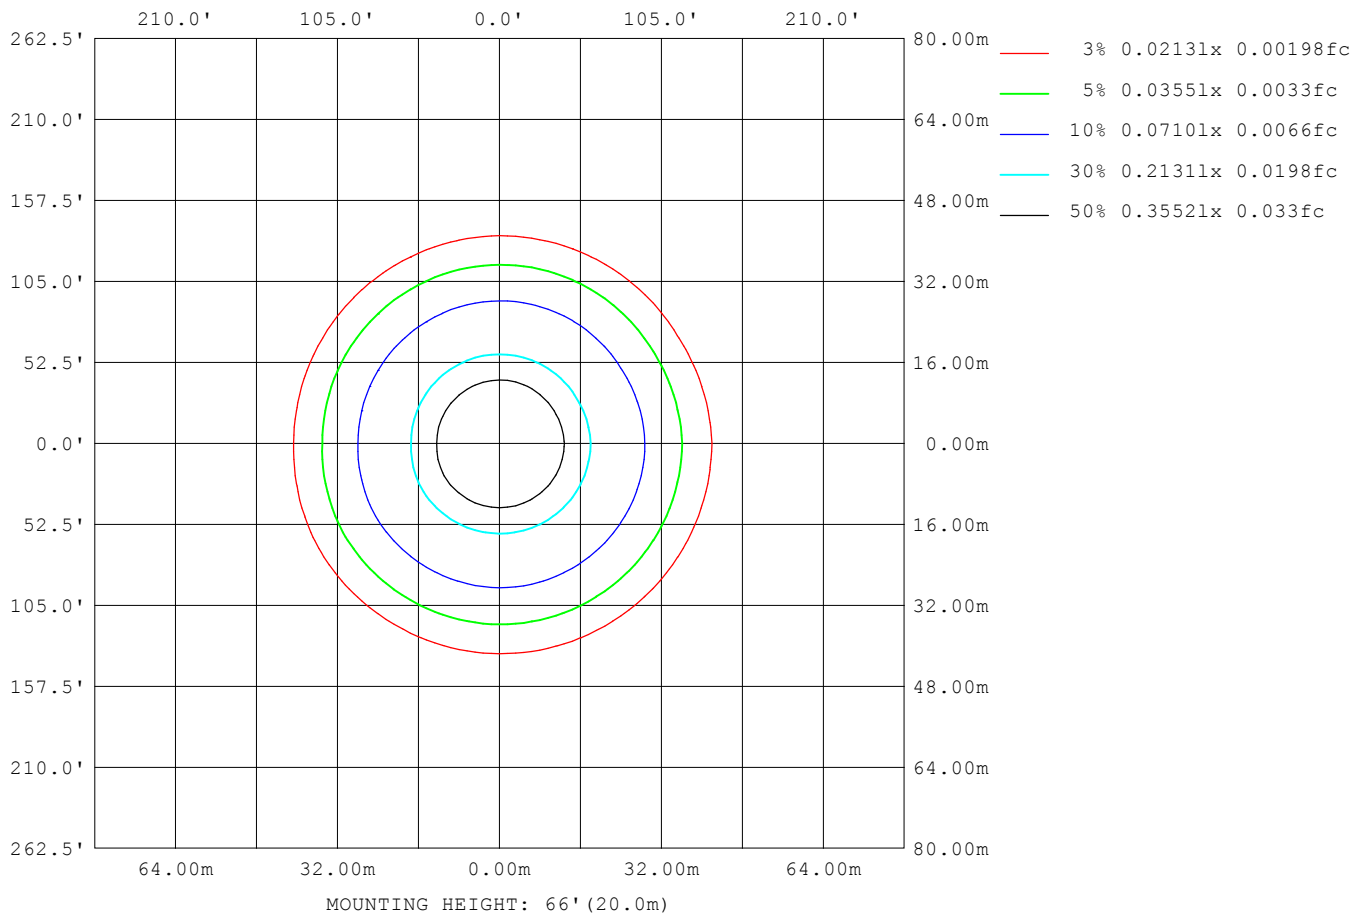

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

LED Avg.L Report

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3338
L_0~180 (75) av	2639
L_0~180 (85) av	820
L_90~270 (65) av	3328
L_90~270 (75) av	2639
L_90~270 (85) av	842
L_45 (65) av	3310
L_45 (75) av	2590
L_45 (85) av	856

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k

Planar Illuminance Curve

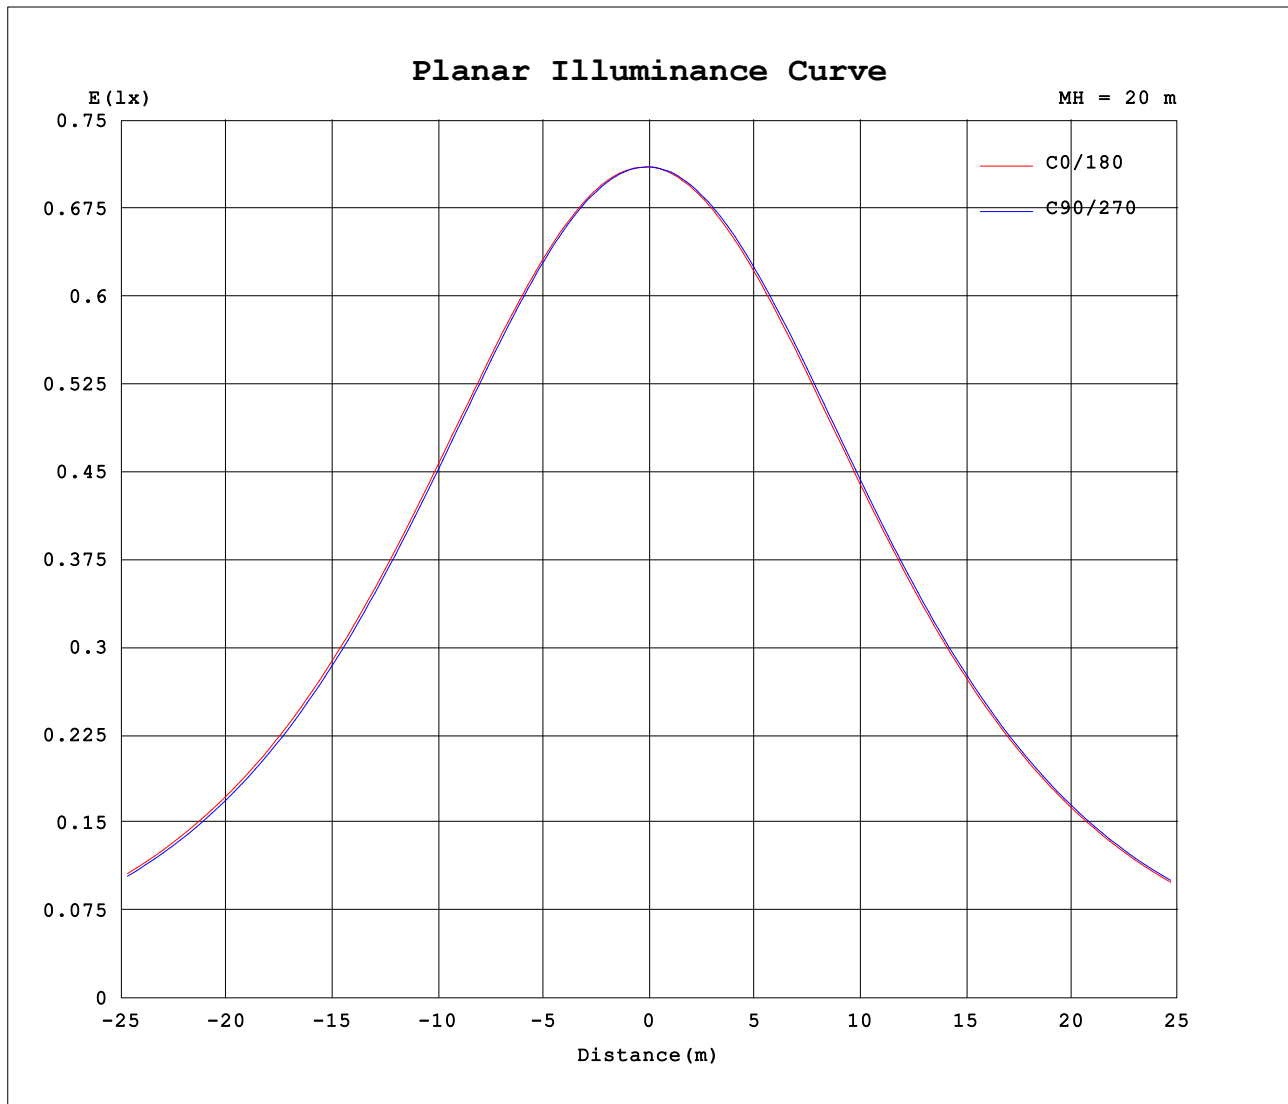

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date: 2021-08-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance: 1.900m [K=1.0765]
Remarks: C2108-44 uv 筒灯 方形 4000k

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.08V I:0.1288A P:14.974W PF:0.9685 Freq:60.01Hz Lamp Flux:795.442x1 lm		
NAME: C2108-44 uv筒灯 方形 4000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	284	284	284	284	284	284	284	284	284	284	284	284						
5	284	284	284	283	283	283	282	282	282	283	283	283						
10	281	281	281	280	280	280	277	278	278	278	279	279						
15	276	276	275	275	274	274	270	271	272	272	272	272						
20	268	268	267	266	266	266	261	262	263	263	263	264						
25	259	258	257	256	256	255	250	250	251	252	252	253						
30	246	245	244	244	243	243	236	237	238	238	239	240						
35	232	231	230	229	228	228	221	222	222	223	224	224						
40	215	214	213	211	211	211	203	204	205	206	207	207						
45	196	195	194	192	191	192	184	185	186	187	188	188						
50	176	175	173	172	171	171	164	164	165	166	167	168						
55	153	152	151	150	148	148	141	142	142	144	145	145						
60	130	128	127	126	124	124	118	118	119	120	121	122						
65	105	103	102	101	99.3	98.6	92.9	93.1	94.1	95.8	96.6	97.1						
70	78.8	77.3	76.1	75.5	73.5	72.6	67.7	67.7	68.8	70.8	71.3	71.8						
75	52.8	51.5	50.3	49.8	47.8	46.8	42.8	42.8	43.9	45.8	46.3	46.8						
80	28.0	27.1	26.2	25.5	23.9	22.9	19.8	20.0	21.0	22.5	23.1	23.6						
85	7.26	7.08	7.05	6.07	5.62	4.89	2.75	3.16	3.75	4.20	4.89	5.22						
90	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
140	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01						
145	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01						
150	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01						
155	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01						
160	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01						
165	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01						
170	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01						
175	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.4DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 36.3%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 4000k