LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 47.08 lm/W			
MODEL		Imax(cd)	263.4	S/MH(C0/180)	1.29
NOMINAL POWER(W)	15.6364	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120.077	TOTAL FLUX(lm)	736.11	η UP,DN(C0-180)	0.0,51.0
NOMINAL FLUX(lm)	736.108	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.077	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

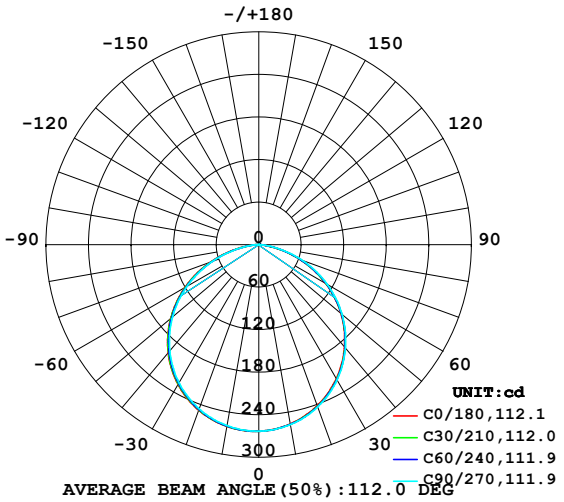

AVERAGE BEAM ANGLE(50%):112.0 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

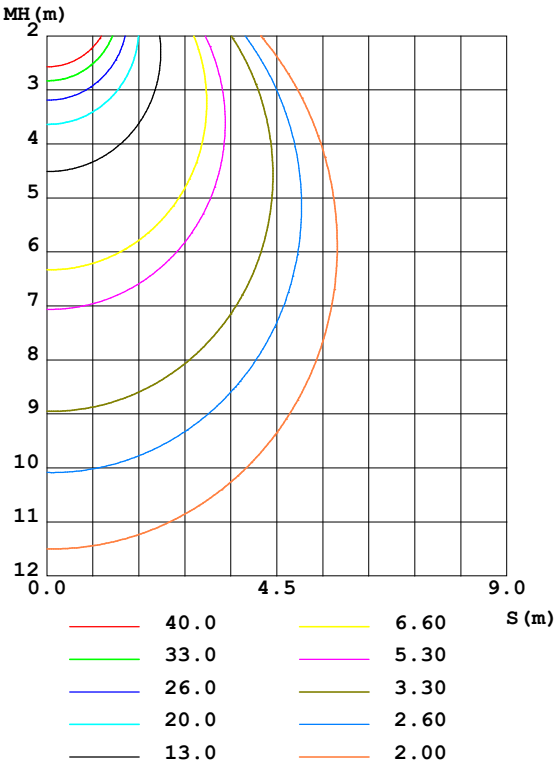

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	260.3	259.8	259.2	259.1	256.7	257.3	257.7	257.9	0- 10	24.90	24.90	3.38,3.38
20	248.4	247.6	246.3	246.1	241.6	242.7	243.5	244.1	10- 20	71.38	96.27	13.1,13.1
30	227.9	226.7	225.0	224.5	218.6	219.8	220.8	221.8	20- 30	108.4	204.6	27.8,27.8
40	198.9	197.6	195.4	194.8	188.3	189.3	190.3	191.9	30- 40	130.8	335.5	45.6,45.6
50	162.4	161.0	158.9	158.0	151.4	152.3	153.5	155.1	40- 50	135.5	471.0	64,64
60	119.9	118.2	116.4	114.8	108.8	109.6	111.3	112.5	50- 60	121.3	592.3	80.5,80.5
70	72.88	71.01	69.33	67.59	62.67	63.17	65.51	66.34	60- 70	89.78	682.1	92.7,92.7
80	25.92	24.61	23.50	21.52	18.30	19.02	20.90	21.67	70- 80	46.33	728.4	99,99
90	0.0534	0.0211	0.0018	0.0005	0	0	0	0	80- 90	7.682	736.1	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0002	736.1	100,100
110	0	0	0	0	0.0019	0.0012	0.0010	0.0014	100-110	0.0003	736.1	100,100
120	0.0007	0.0011	0.0015	0.0010	0.0041	0.0036	0.0034	0.0038	110-120	0.0015	736.1	100,100
130	0.0024	0.0029	0.0034	0.0029	0.0056	0.0052	0.0049	0.0059	120-130	0.0030	736.1	100,100
140	0.0041	0.0041	0.0049	0.0044	0.0058	0.0058	0.0063	0.0072	130-140	0.0038	736.1	100,100
150	0.0048	0.0049	0.0058	0.0055	0.0058	0.0058	0.0066	0.0075	140-150	0.0035	736.1	100,100
160	0.0051	0.0054	0.0061	0.0059	0.0053	0.0055	0.0066	0.0070	150-160	0.0028	736.1	100,100
170	0.0051	0.0051	0.0054	0.0054	0.0039	0.0034	0.0041	0.0051	160-170	0.0016	736.1	100,100
180	0.0017	0.0012	0	0	0.0007	0.0012	0.0007	0	170-180	0.0003	736.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

LUMINANCE LIMITATION CURVES

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

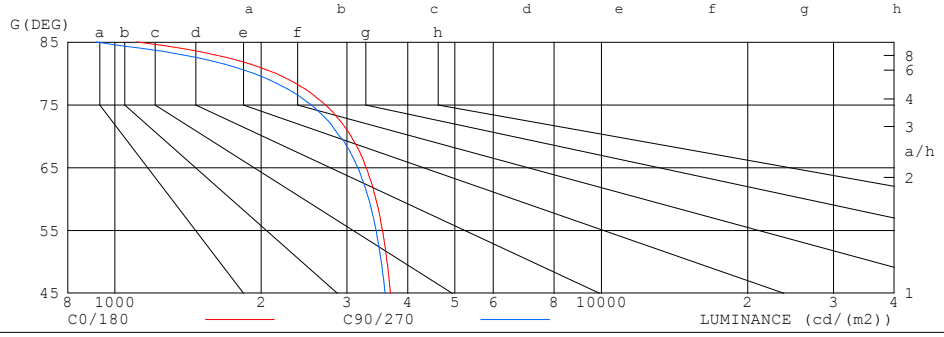

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1111	916
80	2143	1932
75	2709	2533
70	3059	2895
65	3286	3158
60	3441	3326
55	3548	3444
50	3627	3530
45	3686	3594

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.00	.97	1.02	.98	.95	.98	.95	.92	.94	.92	.89	.91	.89	.87	.85
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.60
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.29	.42	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.37	.31	.26	.25

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

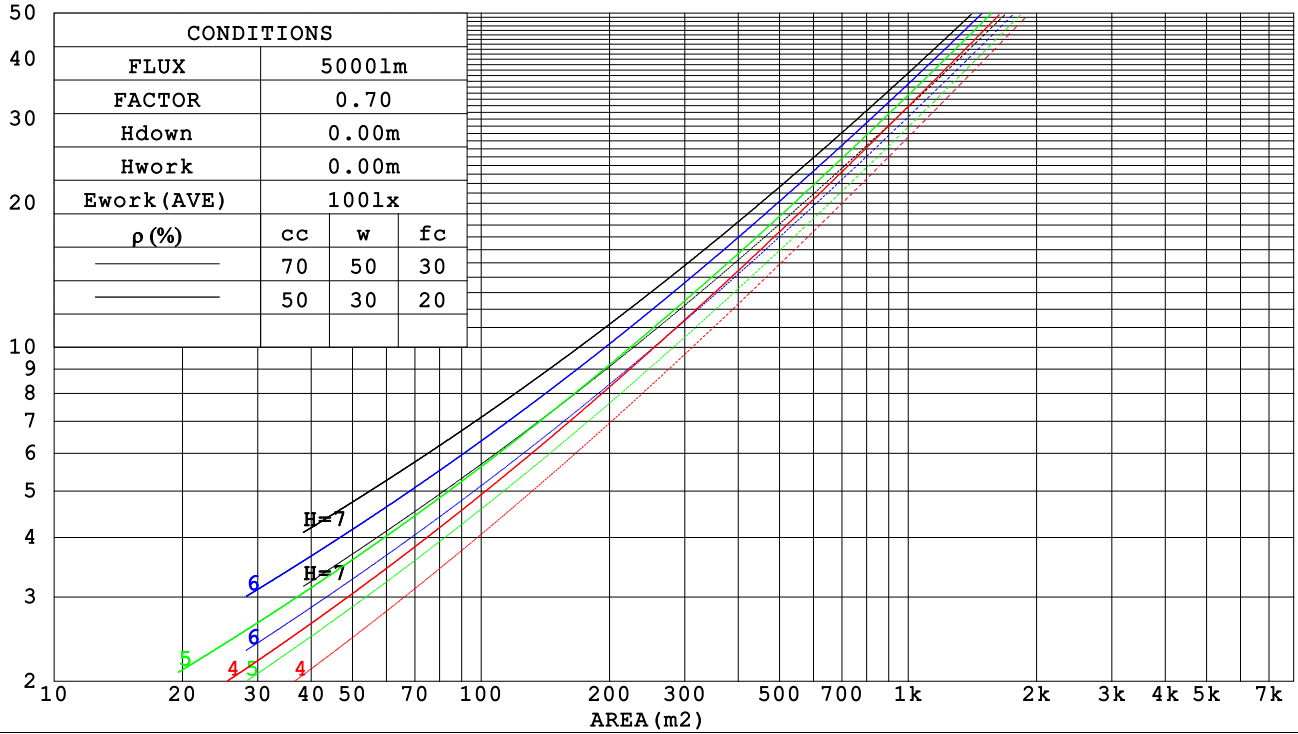

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

WEC AND CCEC

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.297	.169	.054	.290	.166	.053	.277	.159	.051	.265	.153	.049	.254	.147	.047	
2.0	.284	.156	.048	.278	.153	.047	.266	.148	.046	.256	.143	.045	.246	.139	.044	
3.0	.265	.141	.042	.259	.139	.042	.249	.135	.041	.240	.131	.040	.231	.128	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.197	.098	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.176	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.156	.135	.154	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

UGR(Unified Glare Rating) Table

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	17.4	19.0	17.7	19.2	19.4	17.3	18.8	17.6	19.0	19.2
	3H	18.9	20.3	19.2	20.5	20.8	18.7	20.1	19.0	20.4	20.6
	4H	19.5	20.8	19.8	21.0	21.3	19.3	20.6	19.6	20.8	21.1
	6H	19.8	21.0	20.1	21.3	21.6	19.5	20.8	19.9	21.1	21.3
	8H	19.8	21.0	20.2	21.3	21.6	19.6	20.8	19.9	21.1	21.4
	12H	19.8	21.0	20.2	21.3	21.6	19.6	20.7	19.9	21.0	21.3
4H	2H	18.0	19.4	18.3	19.6	19.9	17.9	19.3	18.2	19.5	19.8
	3H	19.7	20.8	20.0	21.1	21.4	19.5	20.7	19.9	21.0	21.3
	4H	20.3	21.4	20.7	21.7	22.0	20.1	21.2	20.5	21.5	21.8
	6H	20.7	21.7	21.1	22.0	22.4	20.5	21.5	20.9	21.8	22.2
	8H	20.8	21.7	21.3	22.1	22.5	20.6	21.5	21.0	21.8	22.2
	12H	20.9	21.7	21.3	22.0	22.4	20.6	21.4	21.0	21.8	22.2
8H	4H	20.5	21.4	20.9	21.8	22.1	20.4	21.2	20.8	21.6	22.0
	6H	21.1	21.8	21.5	22.2	22.6	20.9	21.6	21.3	22.0	22.4
	8H	21.2	21.8	21.7	22.3	22.7	21.0	21.6	21.4	22.0	22.5
	12H	21.3	21.8	21.7	22.3	22.7	21.0	21.6	21.5	22.0	22.5
12H	4H	20.5	21.3	20.9	21.7	22.1	20.4	21.2	20.8	21.5	21.9
	6H	21.1	21.7	21.5	22.1	22.6	20.9	21.5	21.3	21.9	22.4
	8H	21.3	21.8	21.7	22.2	22.7	21.0	21.6	21.5	22.0	22.5
Variations with the observer position at spacings:											
S = 1.0H		+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 736.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.1)
Area: 0.07 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

UTILIZATION FACTORS TABLE

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	58	46	39	57	46	39	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	58	75	65	58	73	66	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	100	92	86	97	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

ISOCANDELA DIAGRAM

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

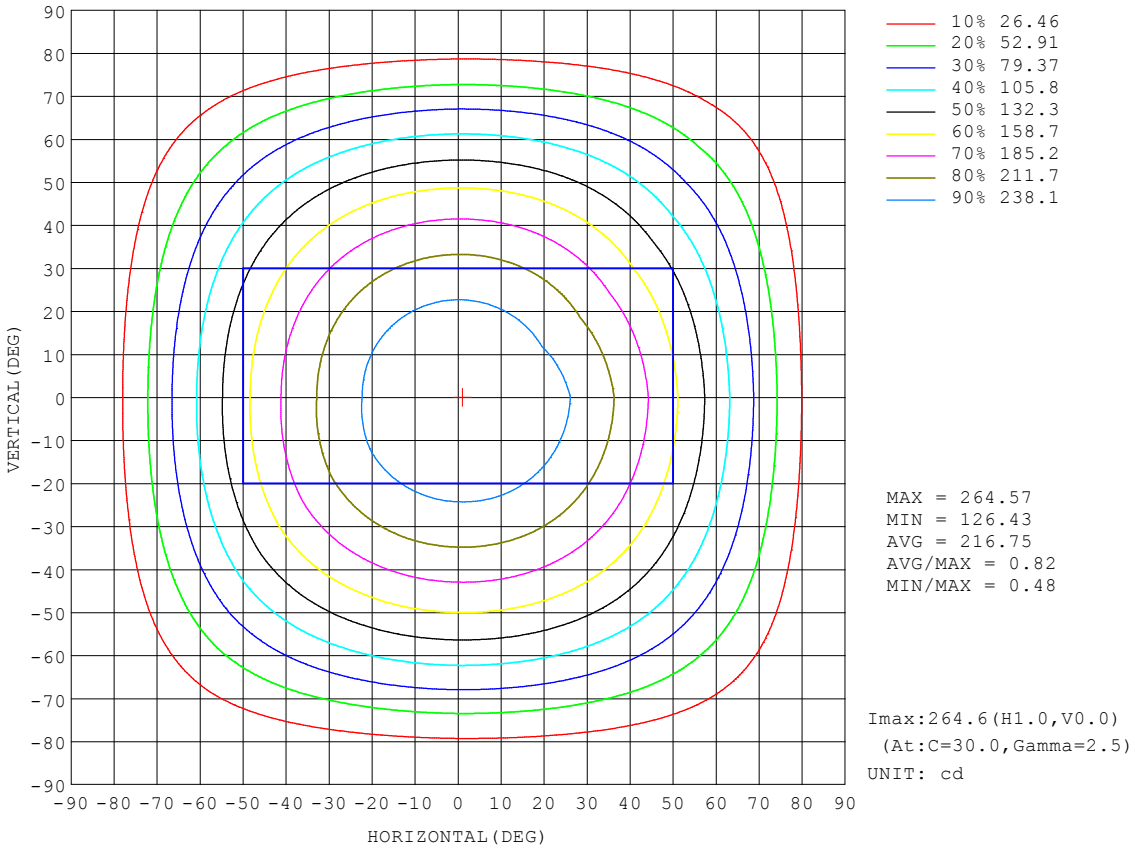

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

AAI Figure

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

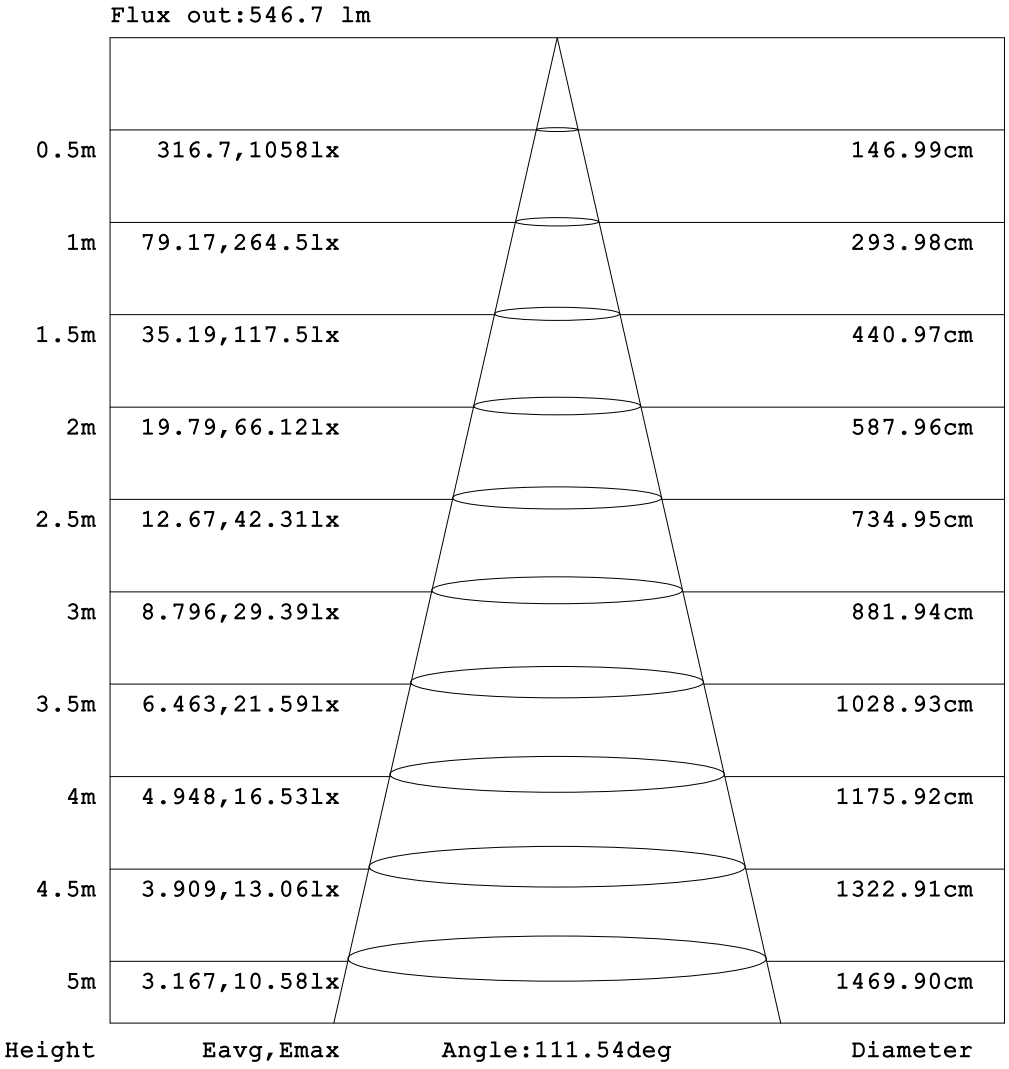

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

ISOLUX DIAGRAM

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

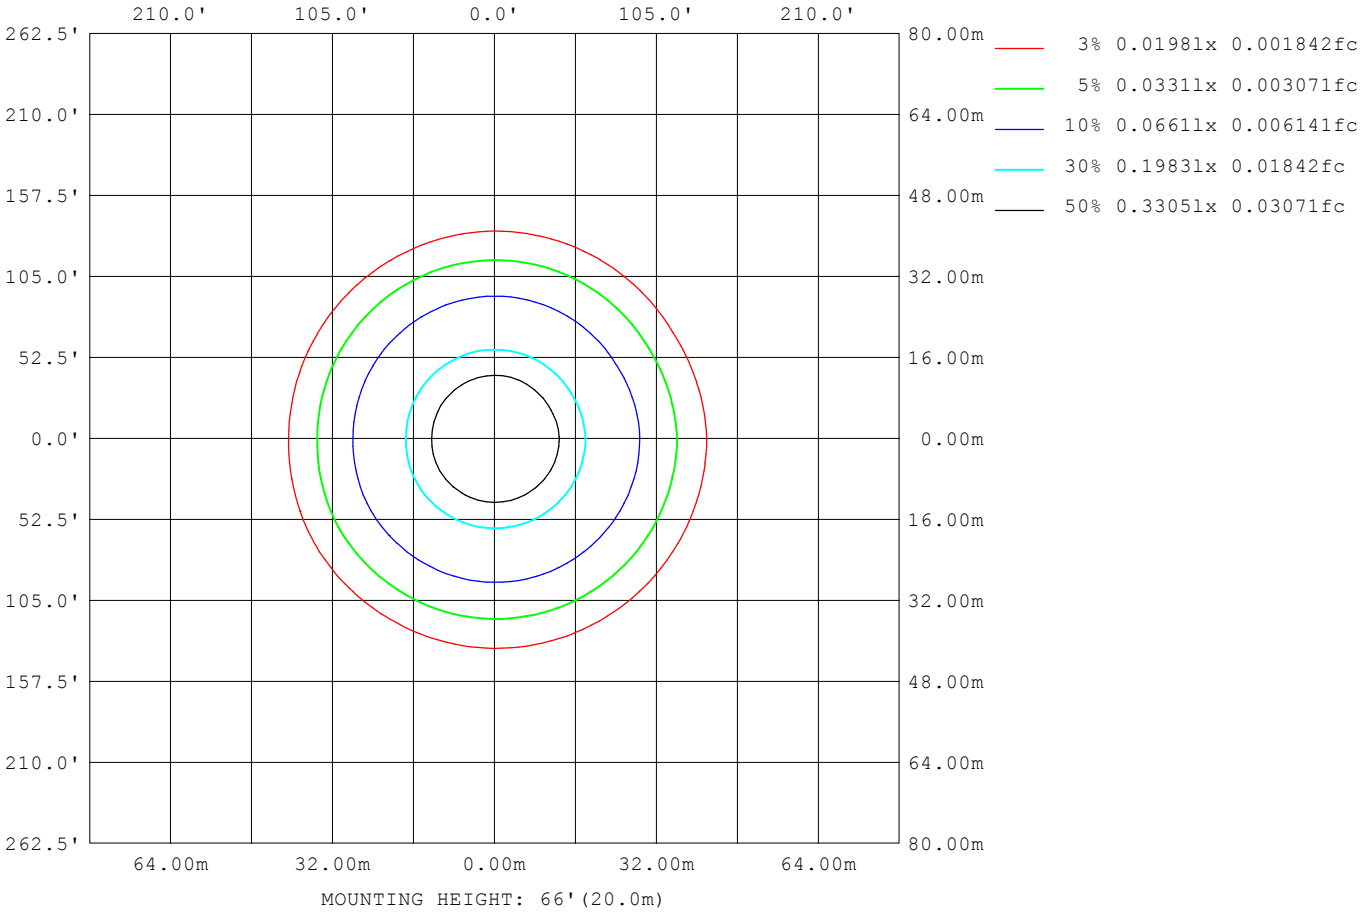

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

LED Avg.L Report

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

AvgL	cd/m2
L_0~180(65)av	3088
L_0~180(75)av	2439
L_0~180(85)av	765
L_90~270(65)av	3079
L_90~270(75)av	2438
L_90~270(85)av	784
L_45(65)av	3063
L_45(75)av	2395
L_45(85)av	798

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

Planar Illuminance Curve

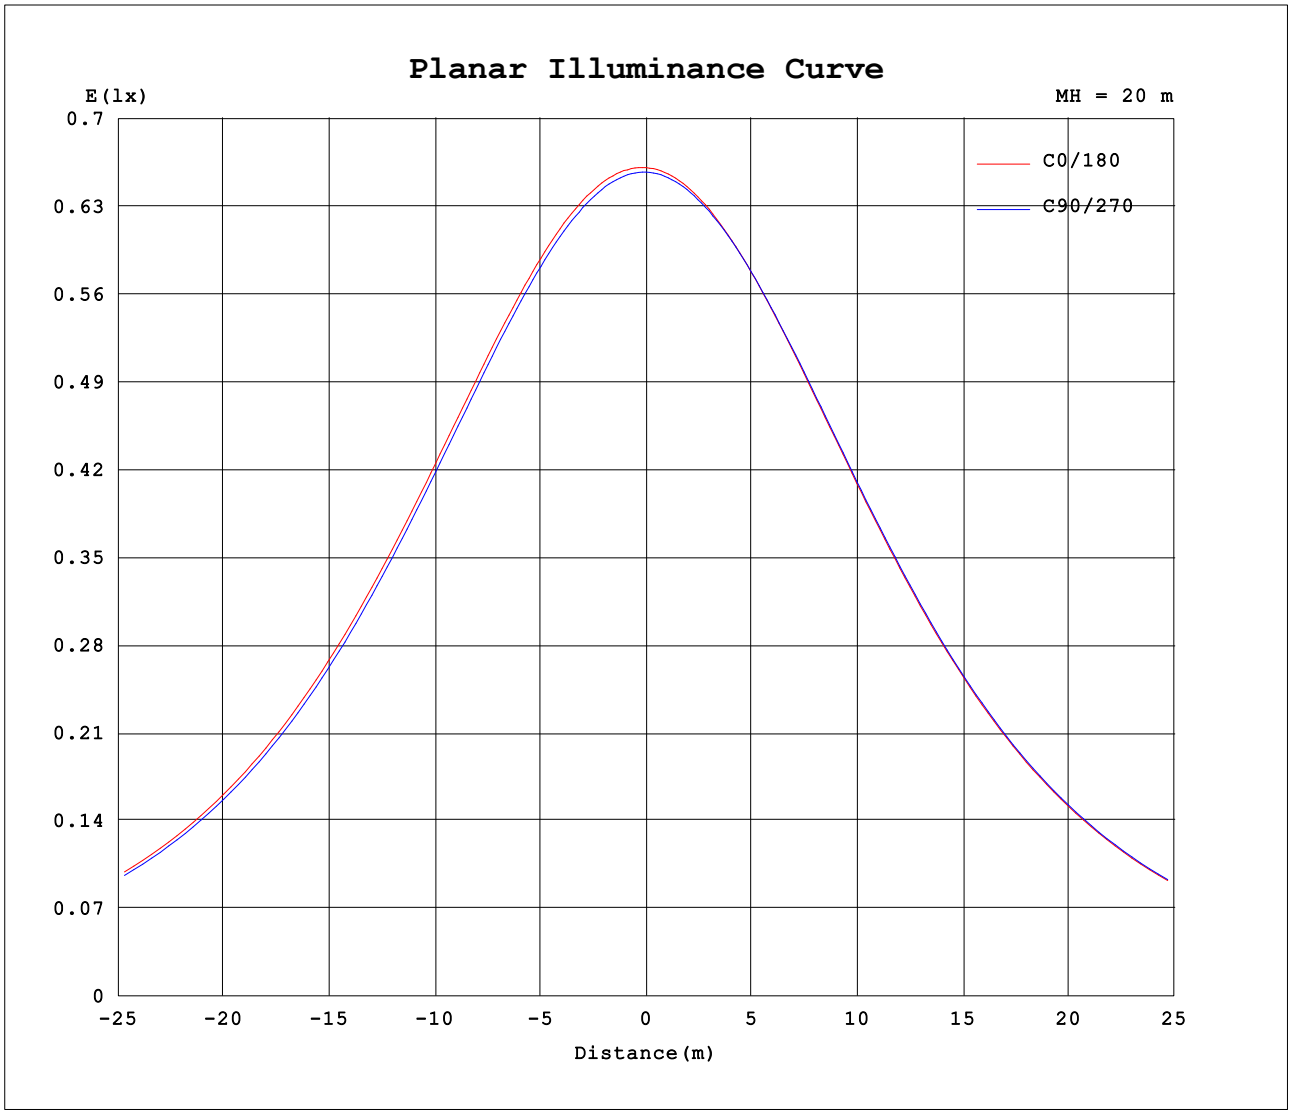

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.08V I:0.1341A P:15.636W PF:0.9707 Freq:60.01Hz Lamp Flux:736.108x1 lm		
NAME: C2108-44 uv筒灯 方形 5000k	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	30	60	90	120	150	180	210	240	270	300	330
0	263	263	263	263	263	263	263	263	263	263	263	263
5	263	263	263	262	262	262	261	261	261	262	262	262
10	260	260	260	259	259	259	257	257	257	258	258	258
15	255	255	255	254	254	254	250	251	251	252	252	252
20	248	248	247	246	246	246	242	242	243	243	244	244
25	239	239	238	237	236	236	231	232	232	233	234	234
30	228	227	226	225	225	224	219	220	220	221	222	222
35	214	214	212	211	211	211	204	205	206	206	207	208
40	199	198	197	195	195	195	188	189	190	190	191	192
45	182	181	179	178	177	177	171	171	172	173	174	175
50	162	162	160	159	158	158	151	152	153	153	155	155
55	142	141	140	138	137	137	131	131	132	133	134	135
60	120	119	118	116	115	115	109	109	110	111	112	113
65	96.7	95.6	94.3	93.5	91.8	91.1	86.0	86.2	87.1	88.7	89.5	90.0
70	72.9	71.6	70.4	69.3	68.0	67.2	62.7	62.7	63.7	65.5	66.1	66.6
75	48.8	47.6	46.5	45.9	44.1	43.2	39.6	39.6	40.6	42.4	42.9	43.4
80	25.9	25.0	24.2	23.5	22.0	21.1	18.3	18.5	19.5	20.9	21.5	21.9
85	6.74	6.83	6.41	5.59	5.02	4.64	2.59	2.95	3.48	3.98	4.59	4.89
90	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.01	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.01	0.01
135	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01
140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01
145	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01
150	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
155	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
160	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
165	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01
170	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.01	0.01
175	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators:
Test Date:2021-08-04

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.416
Humidity: 37.9%
Test Distance:1.900m [K=1.0765]
Remarks: C2108-44 uv筒灯 方形 5000k